

Losberger uniflex – the number one choice of event professionals worldwide.




Losberger U.S., LLC 200 Monroe Ave., Suite 2A Frederick, MD 21701

Phone: 800.964.8368 Fax: 301.682.8005





www.losbergerus.com




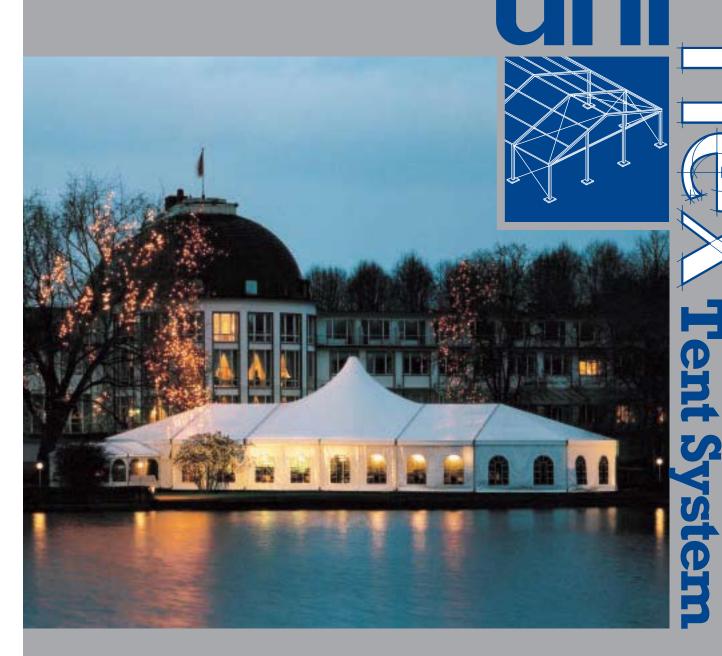



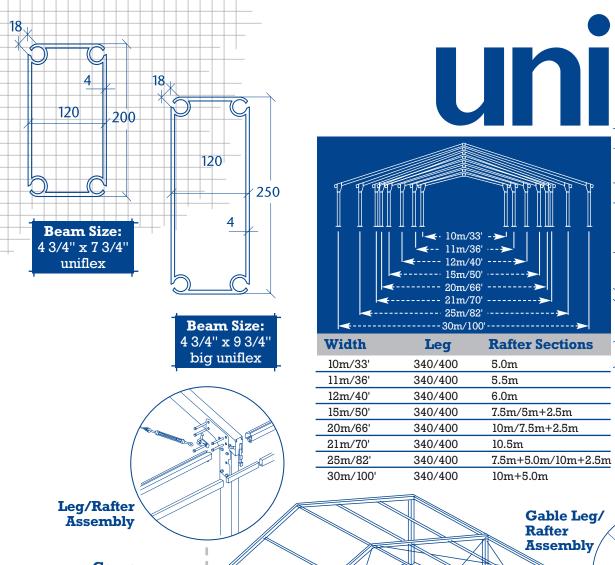

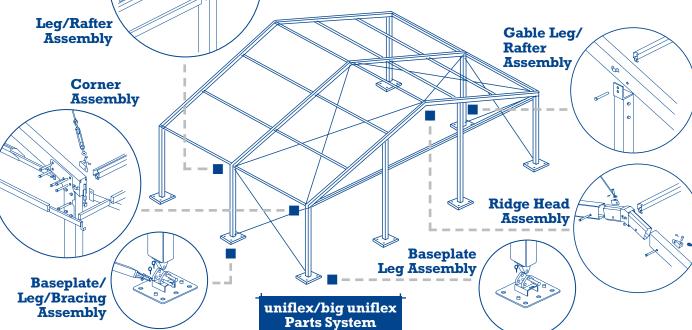



uniflex/big uniflex Bay Dimensions

uniflex/big uniflex frames feature:

- Anodized four channel box beam aluminum
- Galvanized steel connection pieces
- Drop-in roof and eave purlins
- 5m/16' bays
- 9', 11' or 13' eave height
- Interchangeable parts between sizes

- Uniform frame parts speed installation times
- Rafter splice configurations allows flexibility between sizes
- Leg/rafter gusset plates add strength in critical lift areas
- No interior eave cables
- No interior knee braces or rafter struts
- Snow loading optional





- High quality European coated fabric standard material for roof panels, gable ends and sidewalls.
- Kedered roof fabric and sidewalls provide weather tight coverings without lace lines or rain flaps. →
- Push down roof tensioning system:
 - Holds valances in place
 - Provides straight, clean appearance
 - Seals tent for improved air conditioning and heating efficiency
 - Eliminates unsightly web and ratchet straps at each upright.

Versatile – strong – dependable

- Slide back sidewalls remain on the tent
 - Sidewalls are in place at all times
 - Unzip and slide back to open
 - Slide together, zip to close.
- Variety of sidewall window pane designs available.
- Gable end roof vents available.
- **Enclosure system includes:**
 - Glass windows
 - Cassette hardwalls
 - Double door kits.
- Drop-in self-locking, hardwood cassette flooring available.
- Storage and transportation pallets available for glass windows, door kits, cassette walls.
- Liners and interior draping accessories.



