




Delta

Delta Emperor

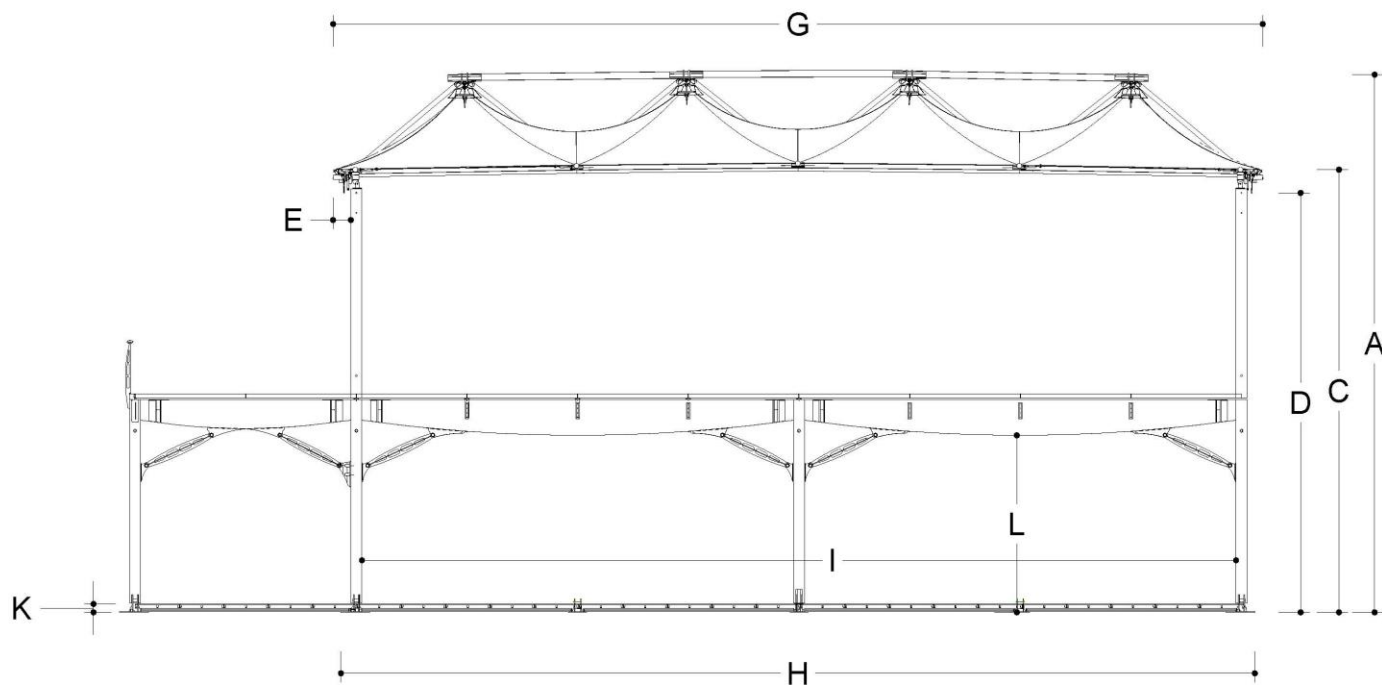


Technical data

	(mm)			
A	External ridge height	11980	Wind load	0,50 kN/m ²
C	External side height	9450	Snow load	0 KN/m ²
D	External free height	9910	Bearing capacity standard floor	500kg/m ²
E	Roof overhang	320	Column profile	250x250
G	External width of the roof	x + 980	Maximum roof load	10 kg/ m ²
H	Maximum width ground level	x + 828	Mounting points in structure	Columns and rafters
I	Internal width between columns	x-200	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
J	Bay distance	5000		
K	Floorheight	183		
L	Maximum headway ground to underside gable purlin	3780*		



Delta

Delta Emperor

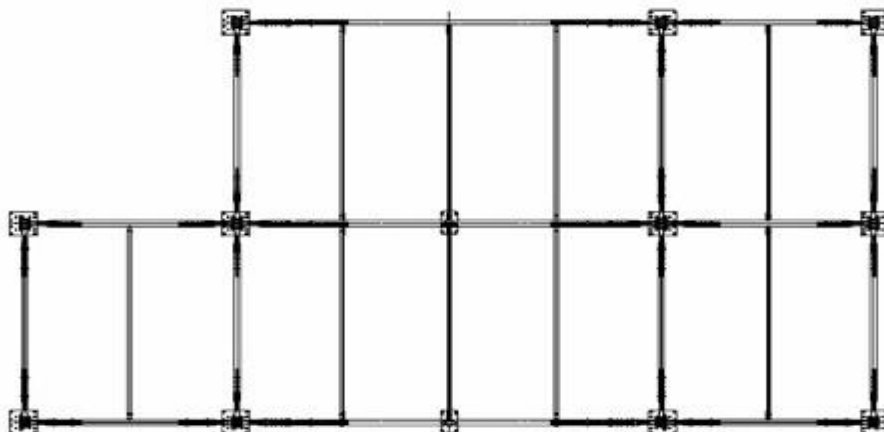

Options

Available roof covers	White opaque roof cover Transparent roof cover	Available side curtains and side panels	Horizontal PVC side panels Horizontale glaspanelen Sandwich side panels
Available floors	Cassette floor Plate floor Antiskid cassette floor	Roof insulation	Yes
Available doors	Aluminium push bar door 2m (blind) Aluminium push bar door 2m (glass) Emergency door Sectional overhead door	Insulation side panels	Yes
		Connection to permanent buildings	Yes
		Connection to other Losberger De Boer structures	Yes