


maxiflex Party and Exhibition Hall

Type: 10.5/340 · Model: 170

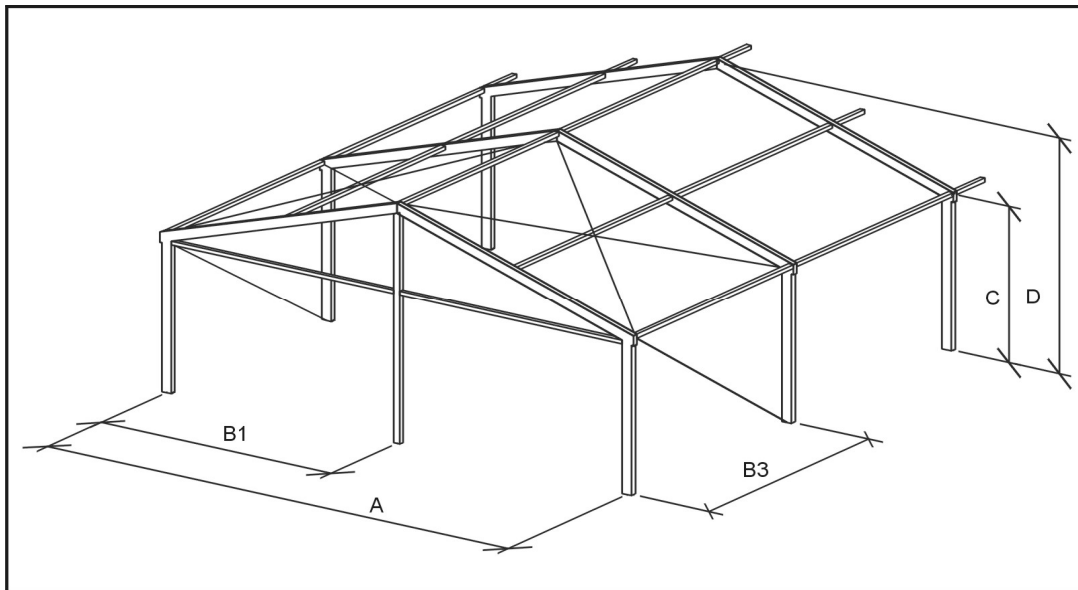

System Measures

Width	(A)	10.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	4.91 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.31 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 10.5/400 · Model: 220

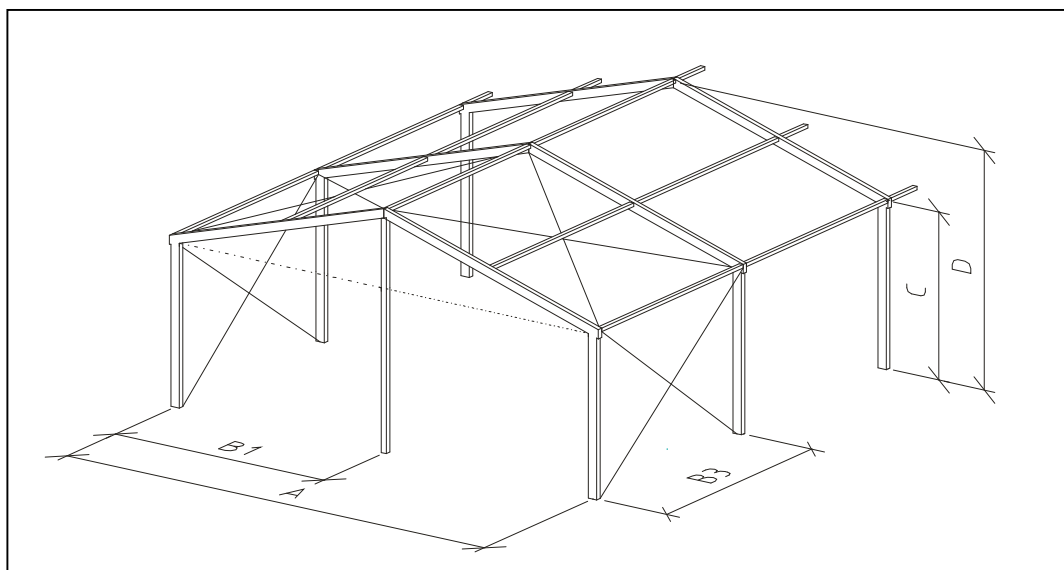

System Measures

Width	(A)	10.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	5.51 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.31 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 10.5/540 · Model: 284

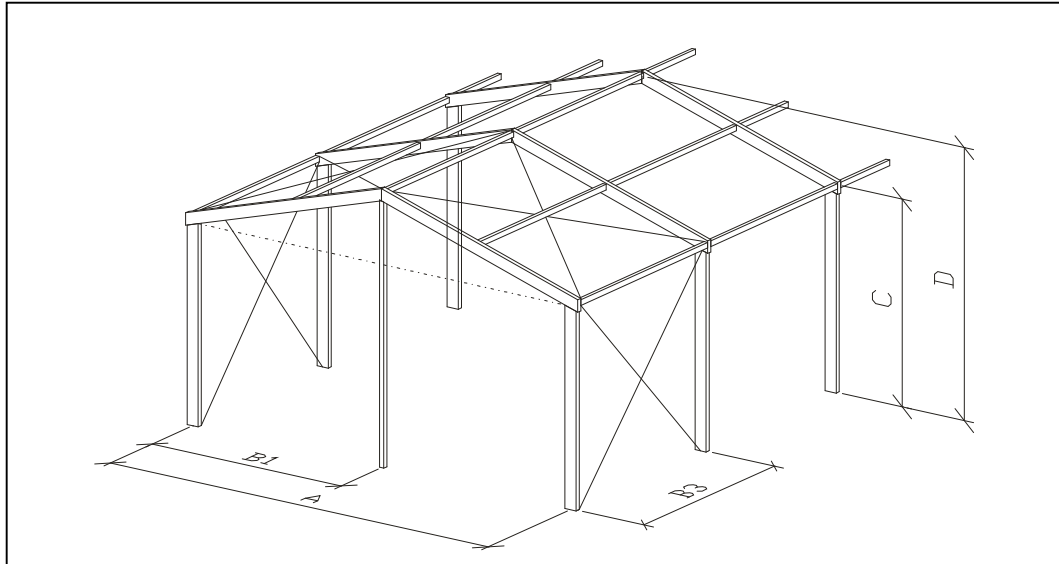

System Measures

Width	(A)	10.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	6.91 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.77 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex

Party and Exhibition Hall

Type: 10.5/680 · Model: XXX

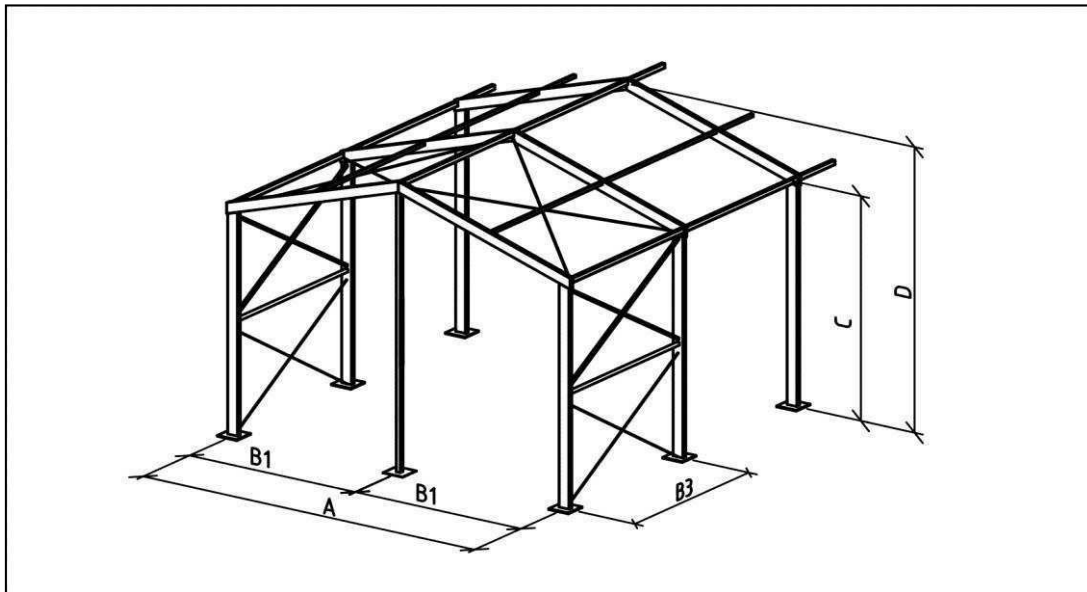

System Measures

Width	(A)	10.18 m
Eave height	(C)	6.64 m
Ridge height	(D)	8.29 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	0,00 m
Truss-distance	(B3)	5.00 m
Roof slope		18,00 °
Longest component		8.13 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed

4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to	DIN EN 13782
Min. length	10.00 m
Max. length	unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer RD Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 15.5/340 · Model: 169

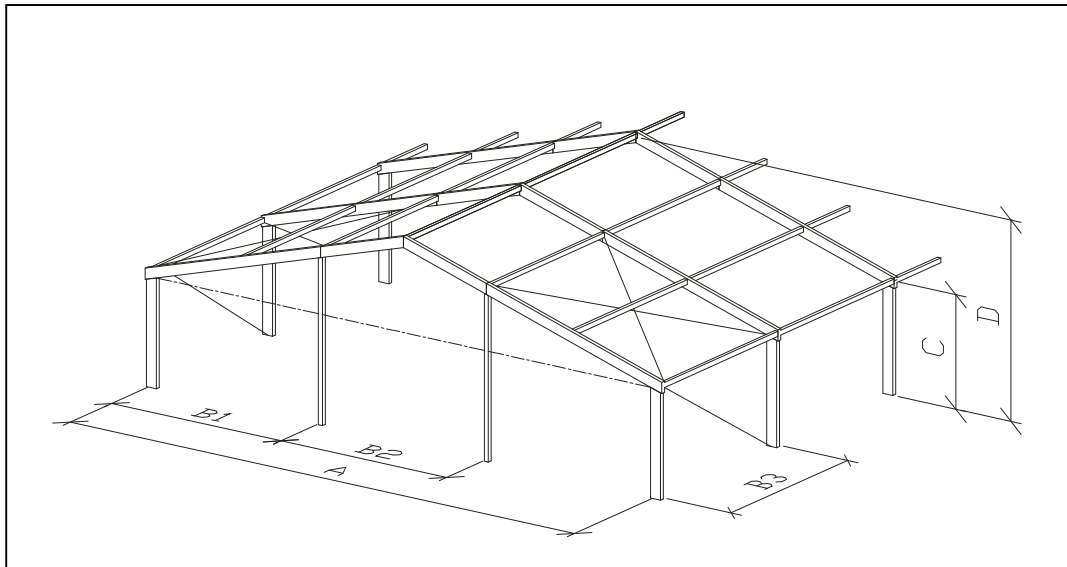

System Measures

Width	(A)	15.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	5.73 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.98 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: info@losbergerus.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 15.5/400 · Model: 216

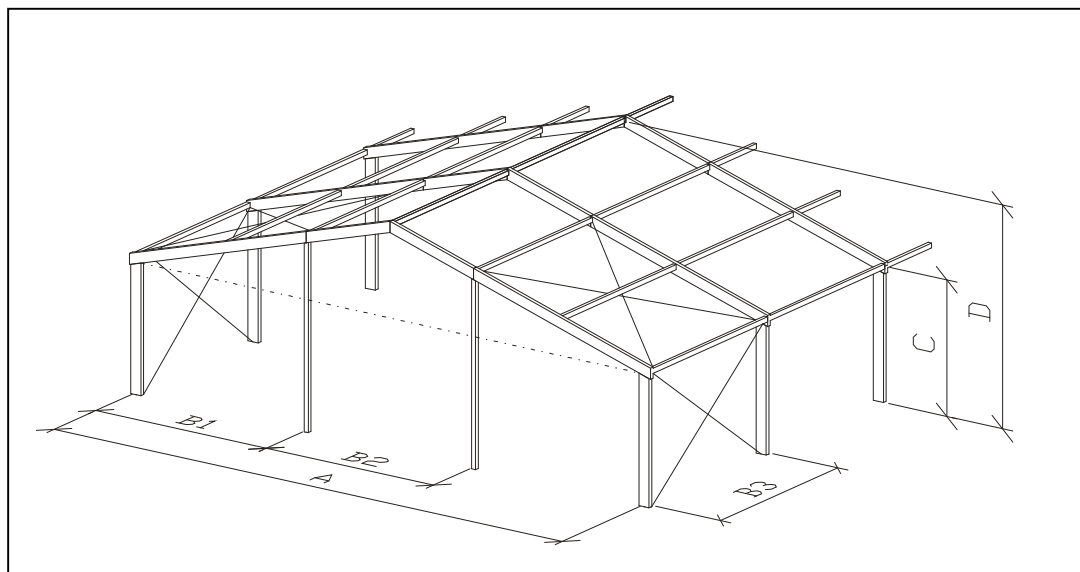

System Measures

Width	(A)	15.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	6.33 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.98 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in 0


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 15.5/540 · Model: 315

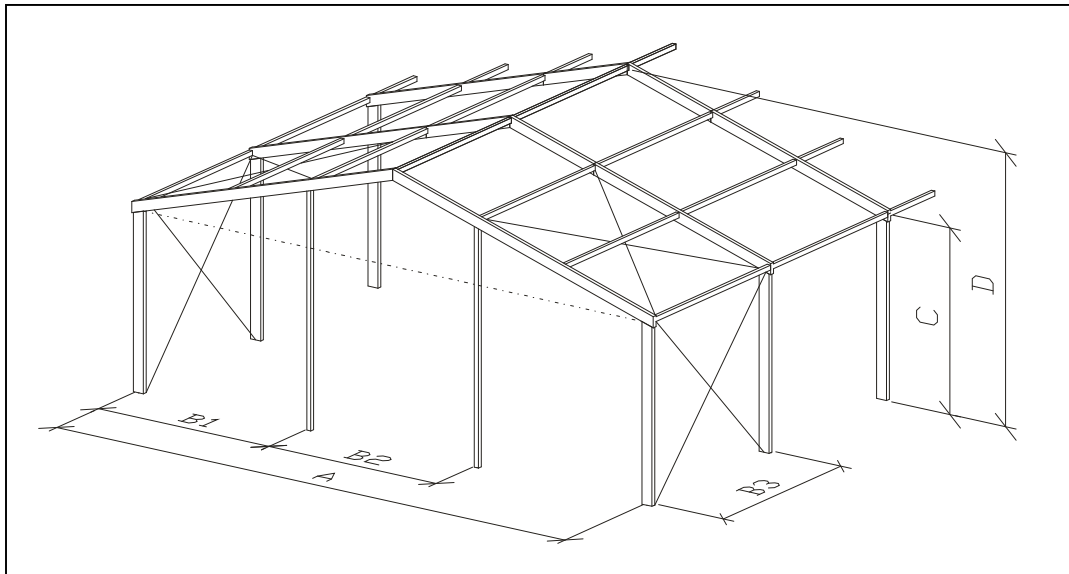

System Measures

Width	(A)	15.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	7.73 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.98 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex

Party and Exhibition Hall

Type: 15.5/680 · Model: XXX

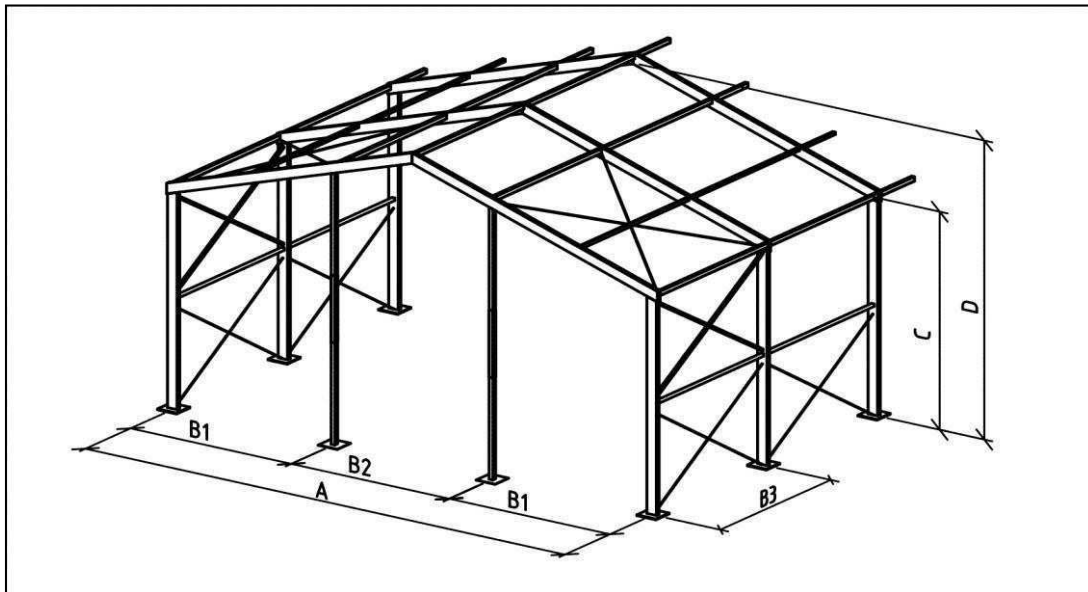

System Measures

Width	(A)	15.18 m
Eave height	(C)	6.64 m
Ridge height	(D)	9.11 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18,00 °
Longest component		8.13 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to	DIN EN 13782
Min. length	10.00 m
Max. length	unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer RD Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 20.5/340 · Model: 168

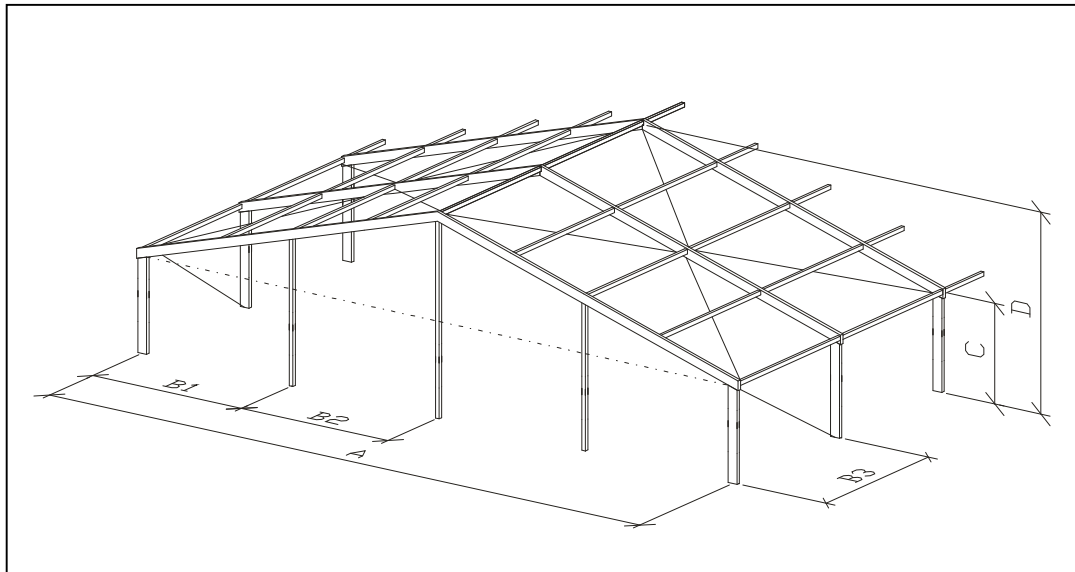

System Measures

Width	(A)	20.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	6.54 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 20.5/400 · Model: 310

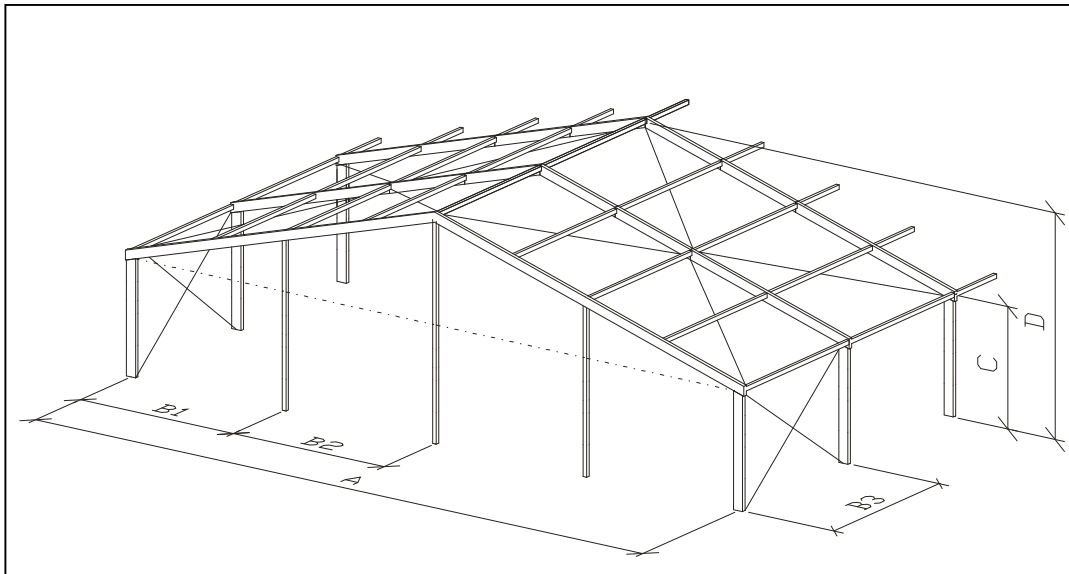

System Measures

Width	(A)	20.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	7.14 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 20.5/540 · Model: 218

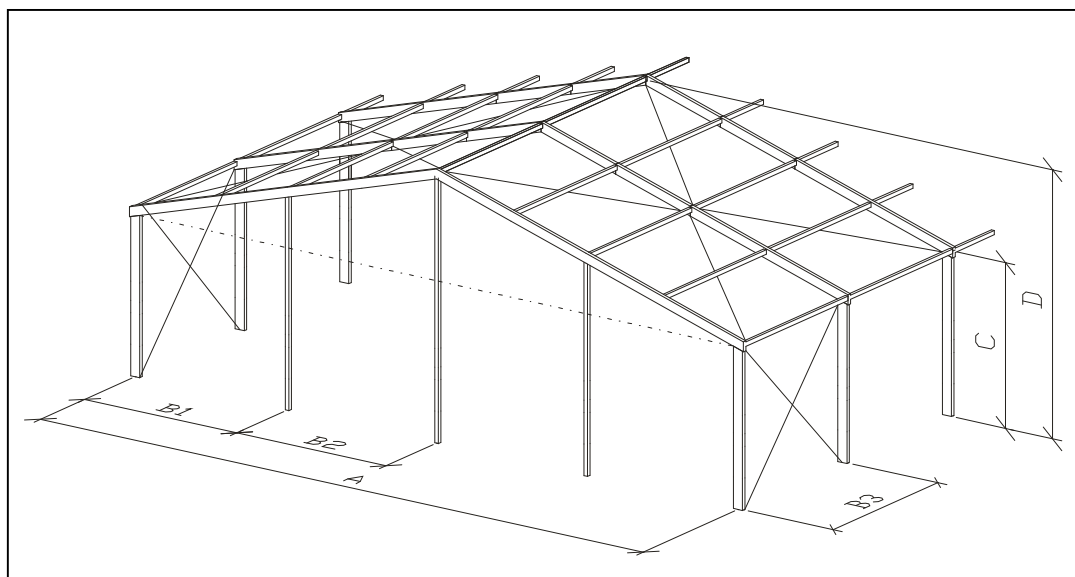

System Measures

Width	(A)	20.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	8.54 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex

Party and Exhibition Hall

Type: 20.5/680 · Model: XXX

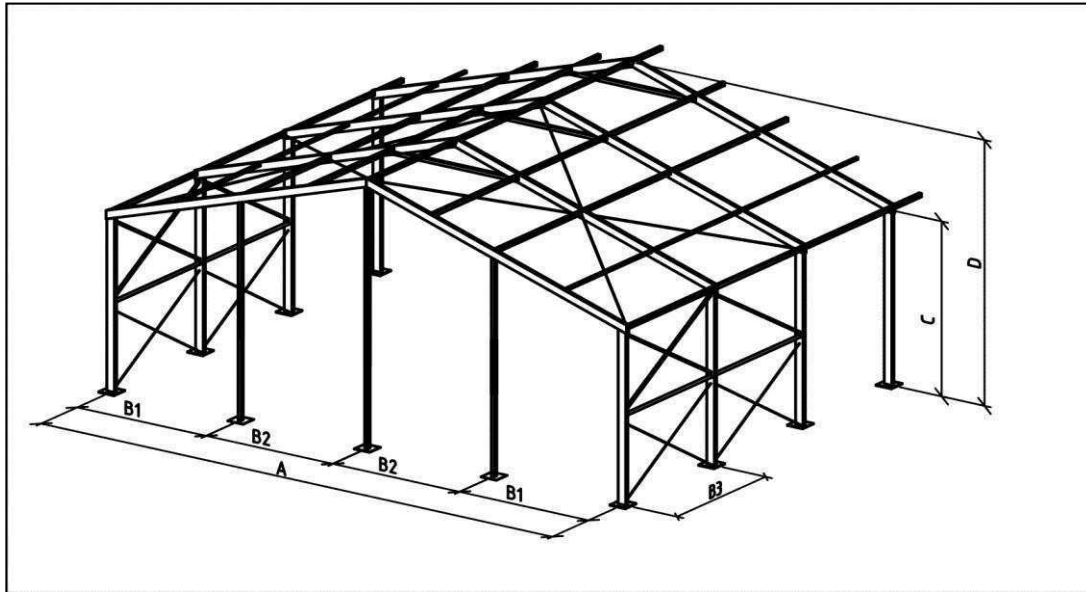

System Measures

Width	(A)	20.18 m
Eave height	(C)	6.64 m
Ridge height	(D)	9.92 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18,00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to	DIN EN 13782
Min. length	20.00 m
Max. length	unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer RD Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 25.5/340 · Model: 171

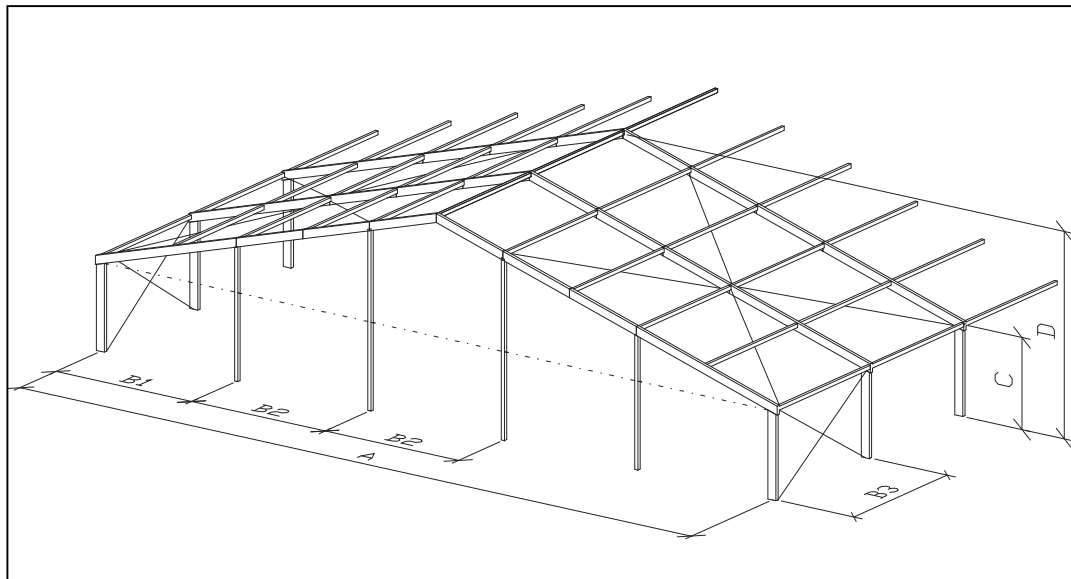

System Measures

Width	(A)	25.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	7.35 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 25.5/400 · Model: 311

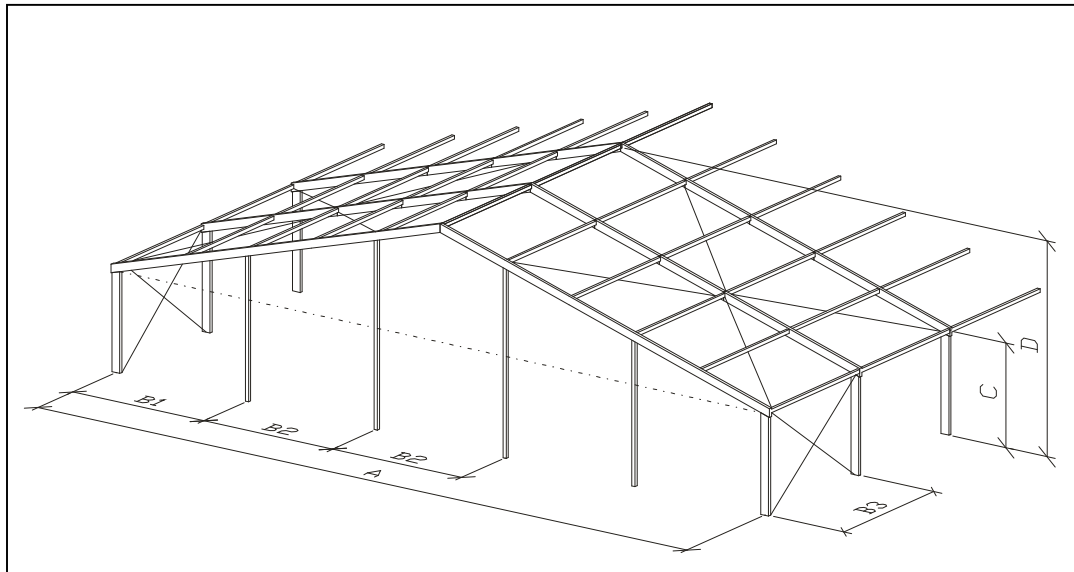

System Measures

Width	(A)	25.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	7.95 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 25.5/540 · Model: 316

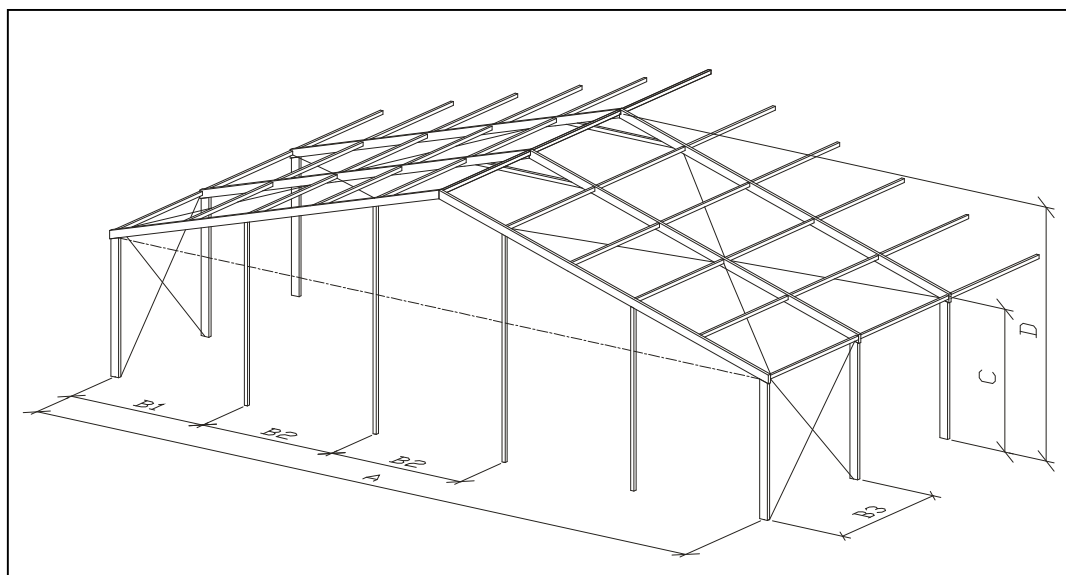

System Measures

Width	(A)	25.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	9.35 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex

Party and Exhibition Hall

Type: 25.5/680 · Model: XXX

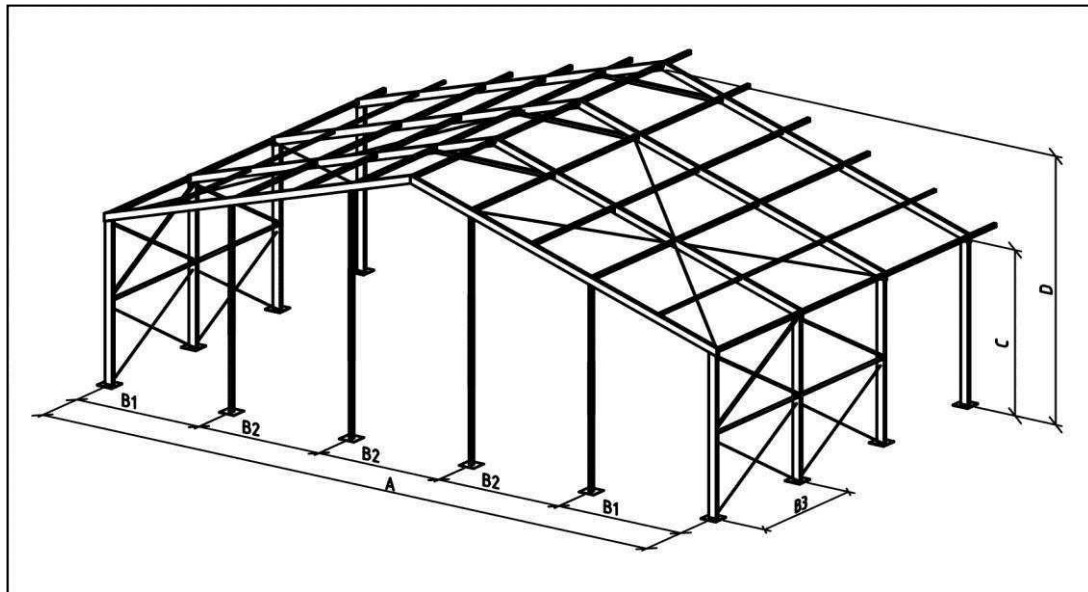

System Measures

Width	(A)	25.18 m
Eave height	(C)	6.64 m
Ridge height	(D)	10.74 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18,00 °
Longest component		9.76 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to	DIN EN 13782
Min. length	20.00 m
Max. length	unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer RD Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 30.5/340 · Model: 153

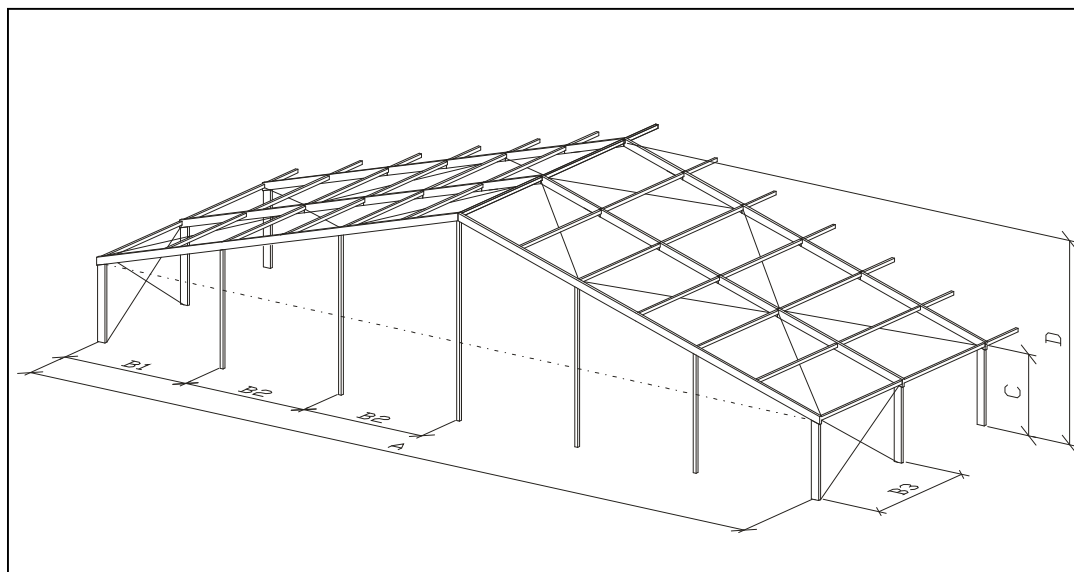

System Measures

Width	(A)	30.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	8.16 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 30.5/400 · Model: 312

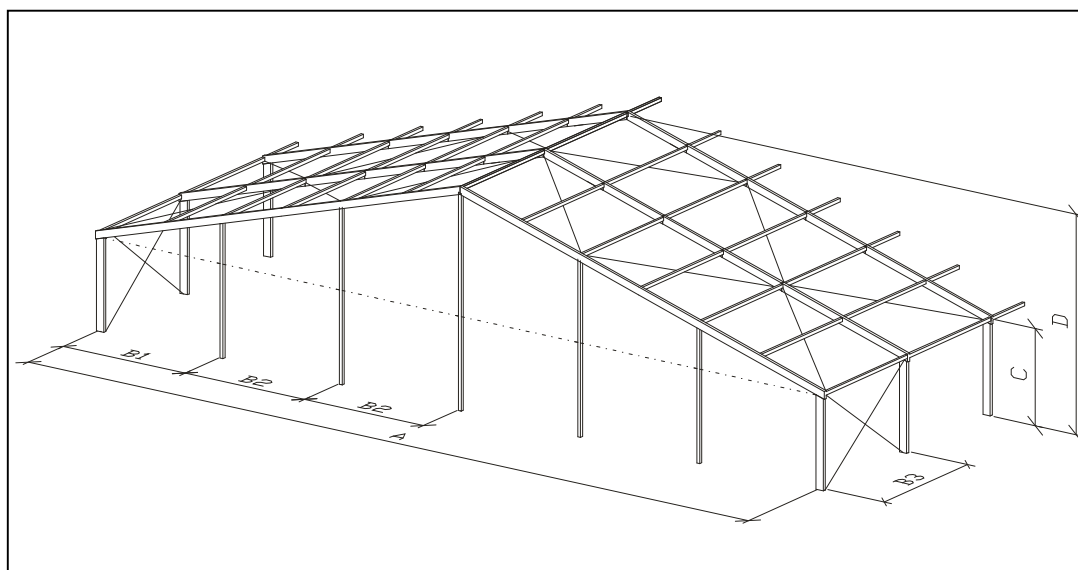

System Measures

Width	(A)	30.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	8.76 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 30.5/540 · Model: 317

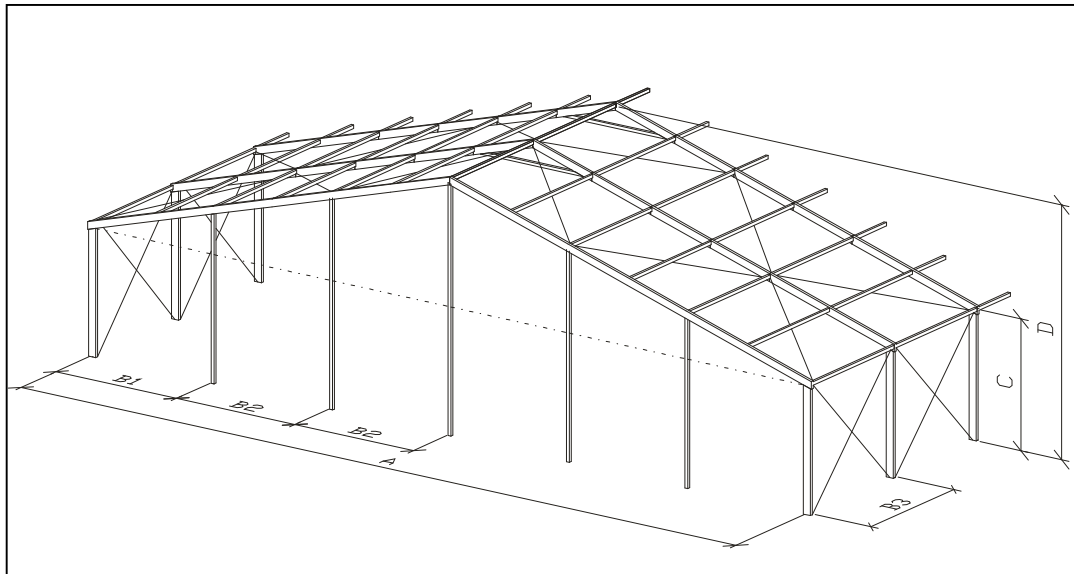

System Measures

Width	(A)	30.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	10.18 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex

Party and Exhibition Hall

Type: 30.5/680 · Model: 921

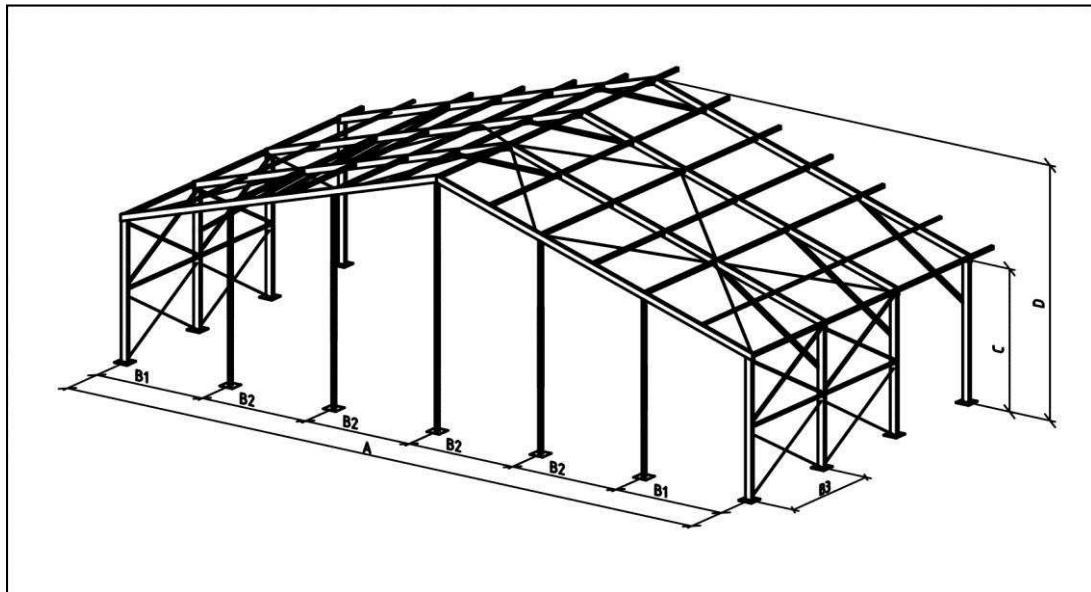

System Measures

Width	(A)	30.18 m
Eave height	(C)	6.64 m
Ridge height	(D)	11.55 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18,00 °
Longest component		11.38 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed

4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to	DIN EN 13782
Min. length	25.00 m
Max. length	unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer RD Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 35.5/400 · Model: 802

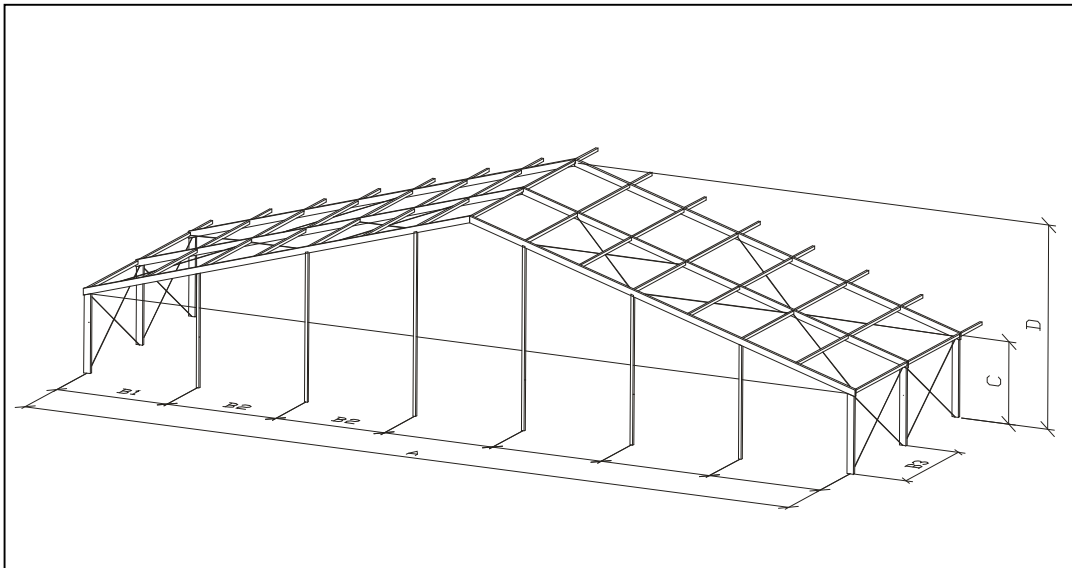

System Measures

Width	(A)	35.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	9.58 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		11.80 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex

Party and Exhibition Hall

Type: 30.5/680 · Model: 921

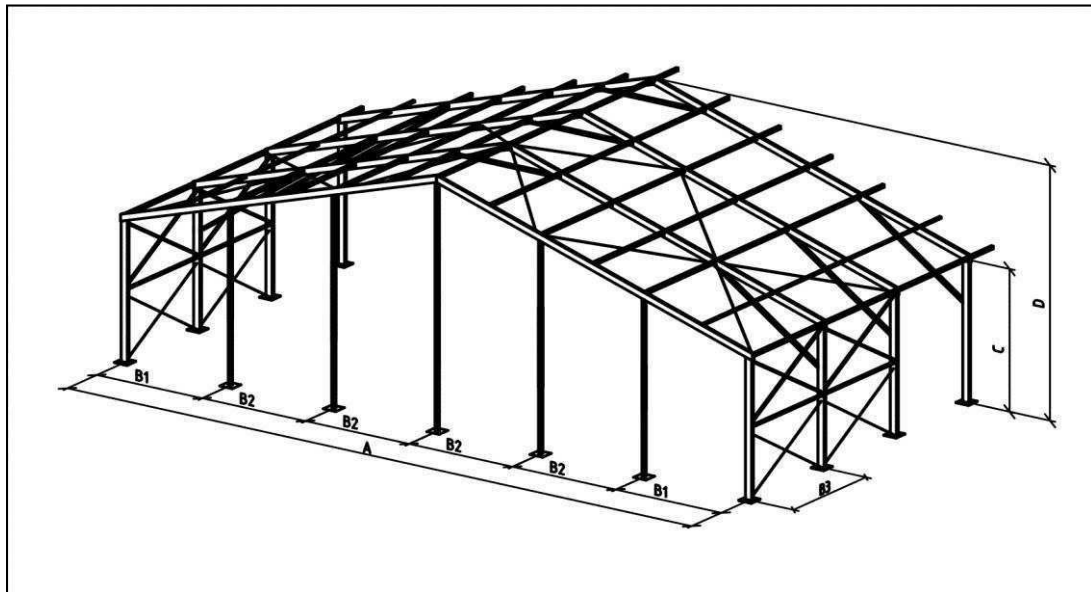

System Measures

Width	(A)	30.18 m
Eave height	(C)	6.64 m
Ridge height	(D)	11.55 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18,00 °
Longest component		11.38 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed

4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to	DIN EN 13782
Min. length	25.00 m
Max. length	unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer RD Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 40.5/340 · Model: 151

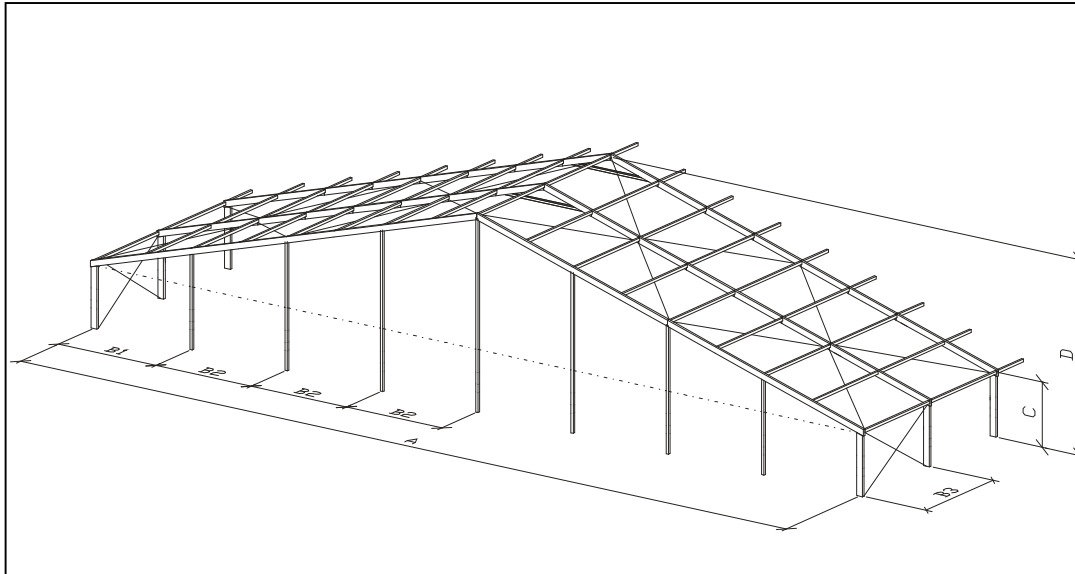

System Measures

Width	(A)	40.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	9.78 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 40.5/400 · Model: 313

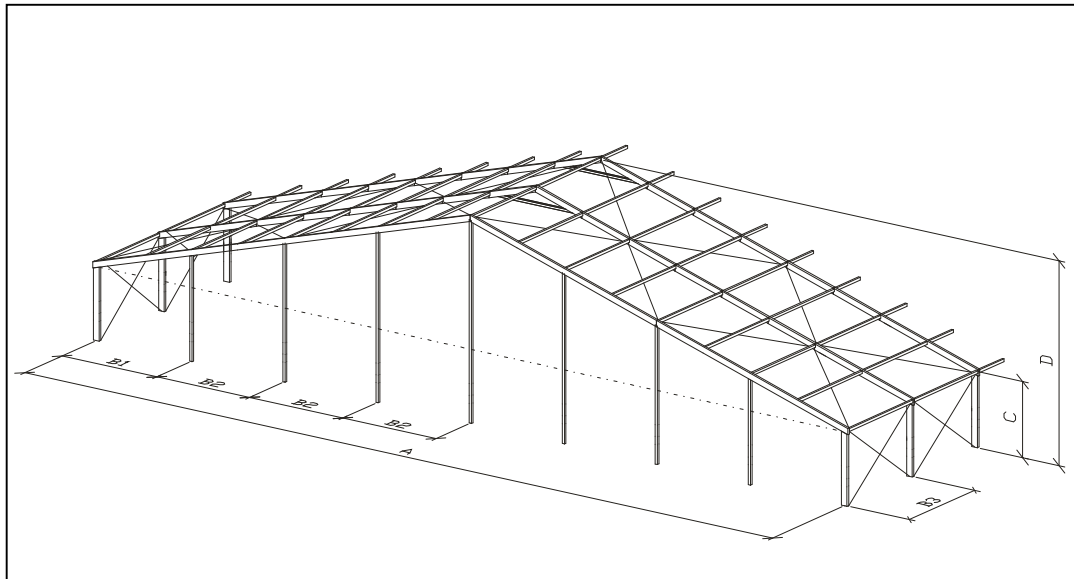

System Measures

Width	(A)	40.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	10.38 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.61 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 40.5/540 · Model: 194

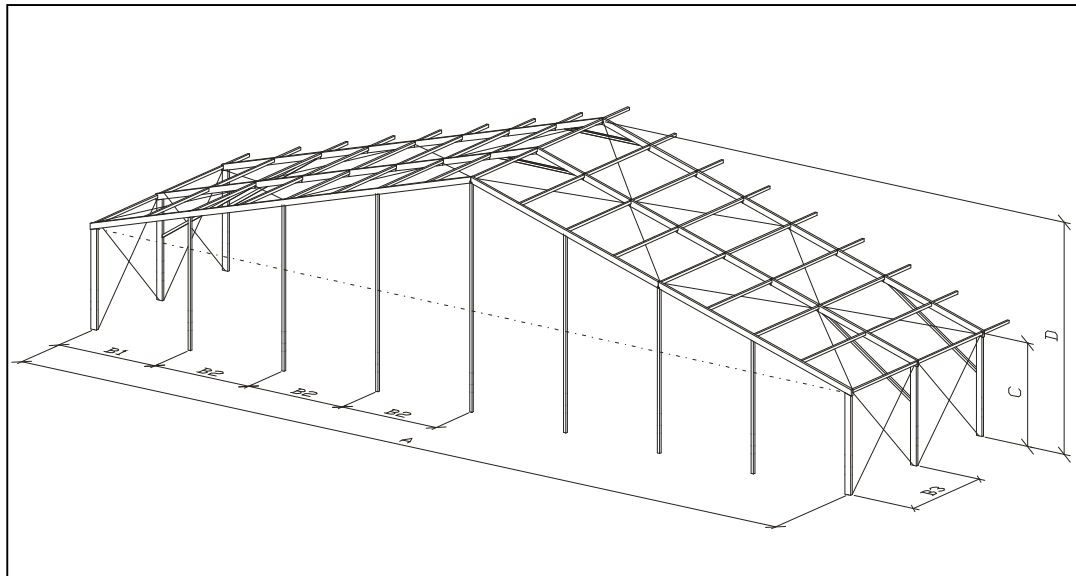

System Measures

Width	(A)	40.18 m
Eave height	(C)	5.26 m
Ridge height	(D)	11.78 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		11.60 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 50.5/340 · Model: 173

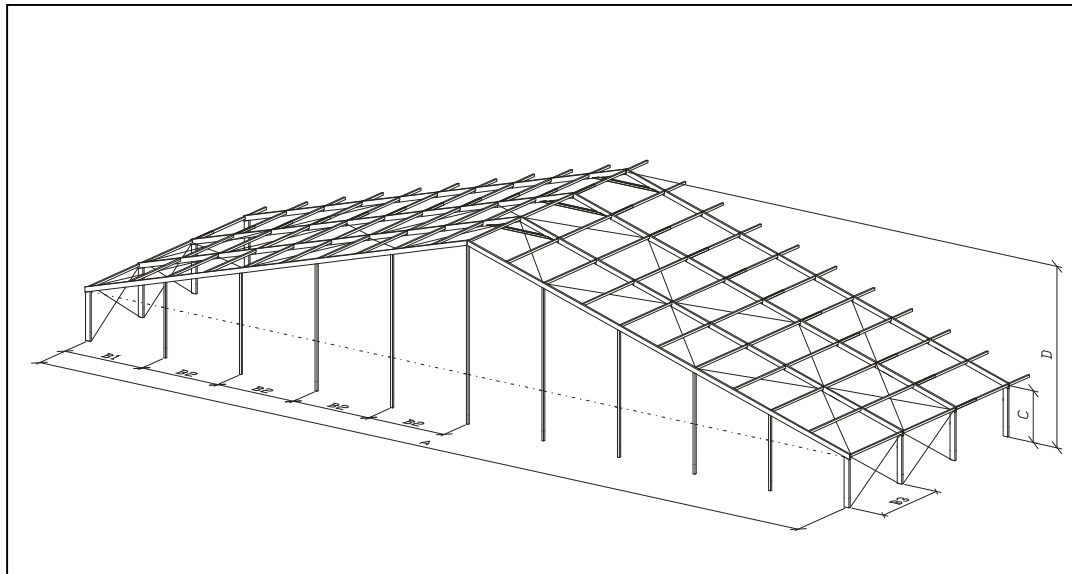

System Measures

Width	(A)	50.18 m
Eave height	(C)	3.26 m
Ridge height	(D)	11.41 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		11.20 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112
Min. length 25.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



maxiflex Party and Exhibition Hall

Type: 50.5/400 · Model: 314

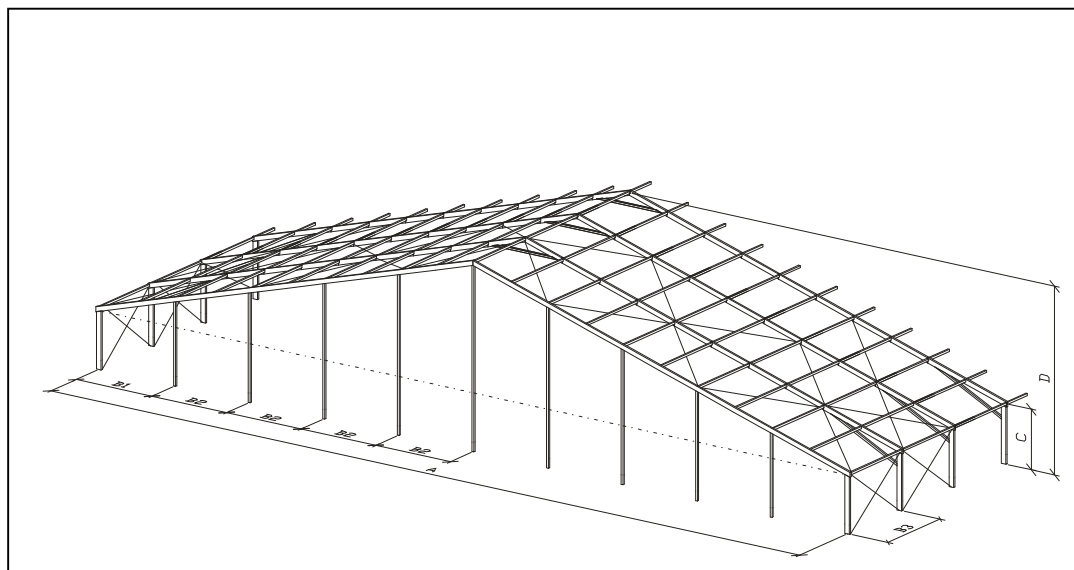

System Measures

Width	(A)	50.18 m
Eave height	(C)	3.86 m
Ridge height	(D)	12.01 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		11.08 m
Truss profile		300 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN 4112
Min. length 30.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com

