


easyflex Party and Exhibition Hall

Type: 10.2/280 · Model: 480

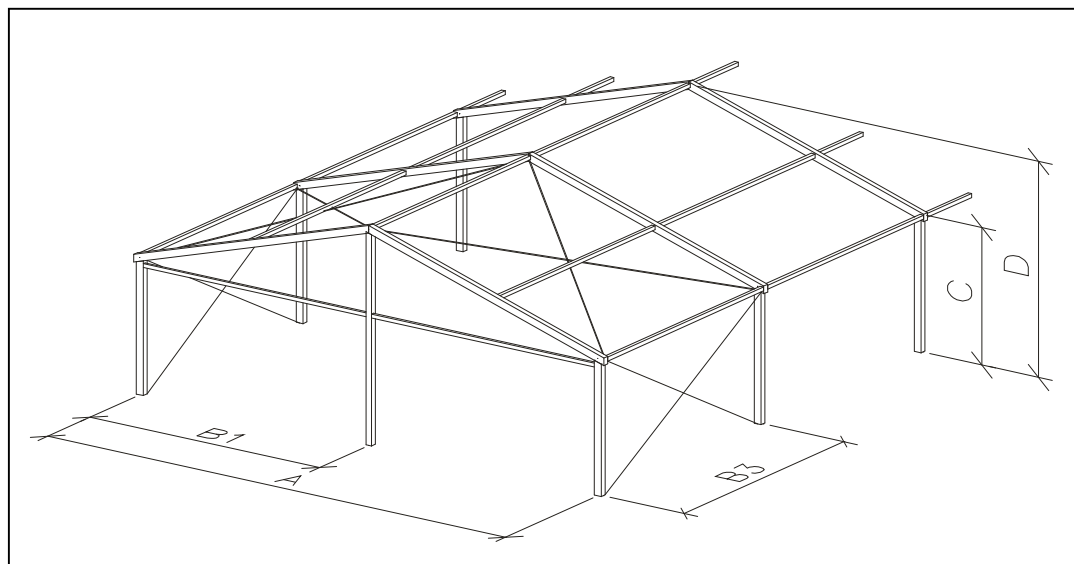

System Measures

Width	(A)	10.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	4.48 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.45 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Wind load acc. to DIN EN 13782

Min. length 10.00 m

Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex plus Party and Exhibition Hall

Type: 10.2/280 · Model: XXX

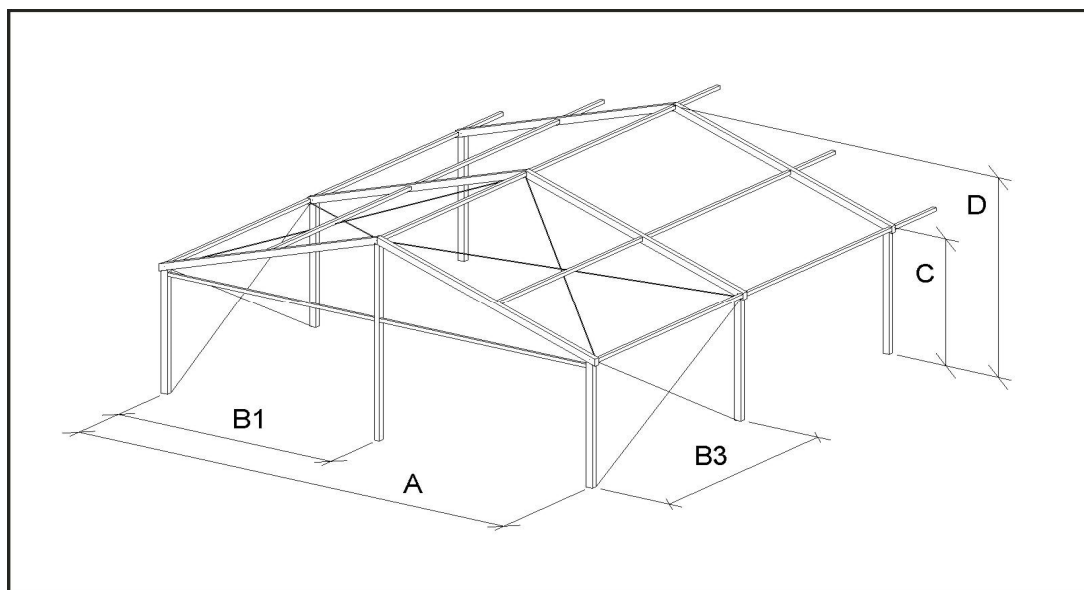

System Measures

Width	(A)	10.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	4.48 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.45 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 10.2/340 · Model: 482

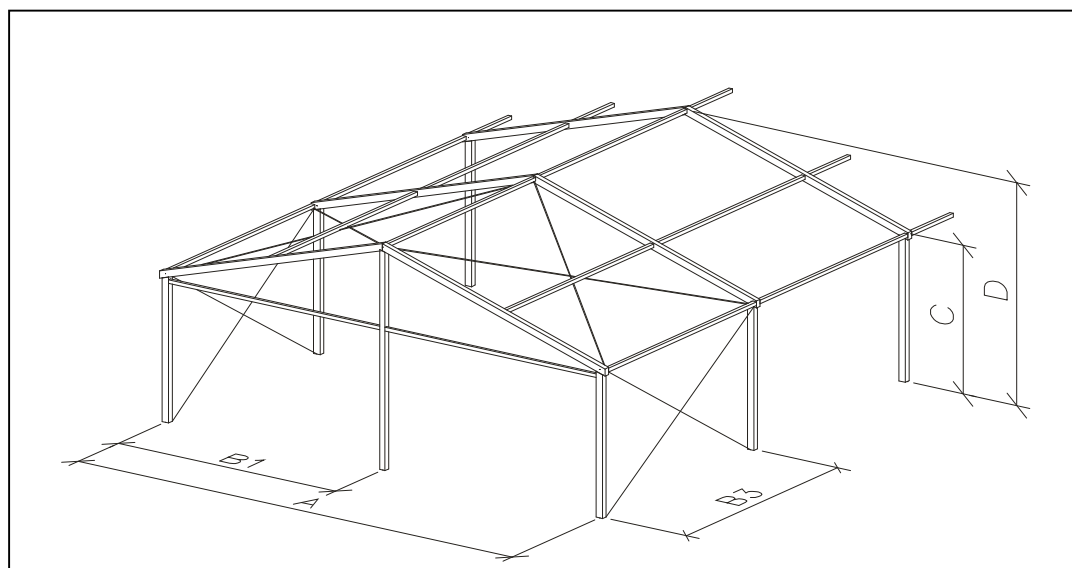

System Measures

Width	(A)	10.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	4.88 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.45 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex plus Party and Exhibition Hall

Type: 10.2/340 · Model: 619

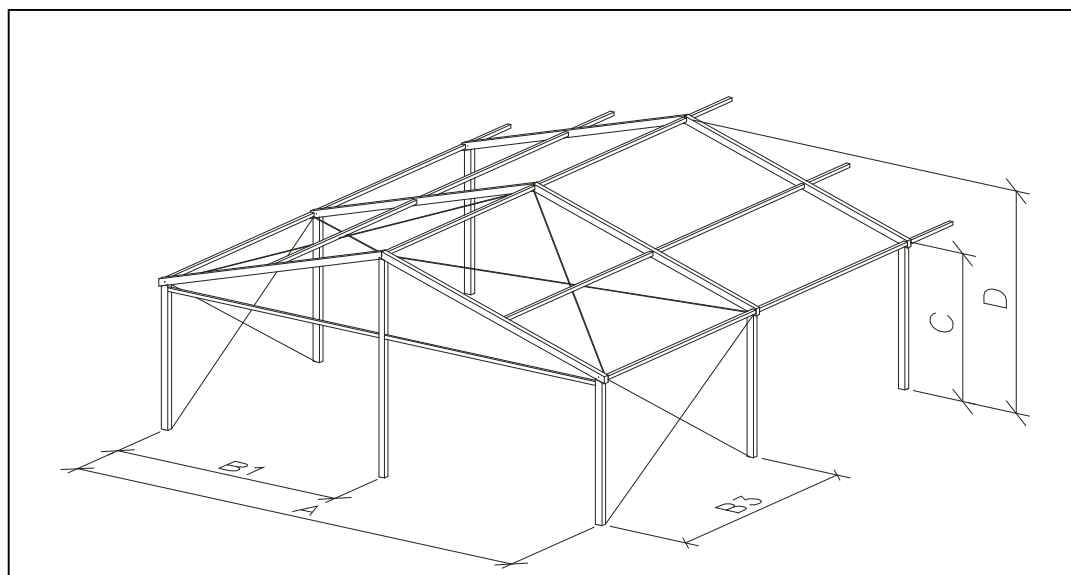

System Measures

Width	(A)	10,03 m
Eave height	(C)	3.25 m
Ridge height	(D)	4.88 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.45 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 11.2/280 · Model: 483

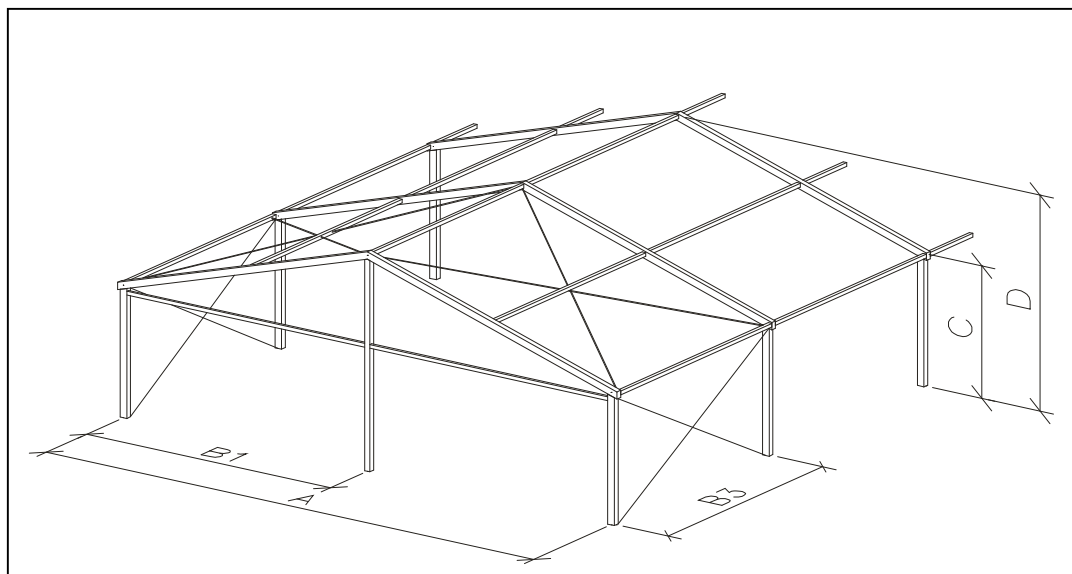

System Measures

Width	(A)	11.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	4.64 m
Gable truss	(B1)	5.51 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.98 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 11.2/340 · Model: 484

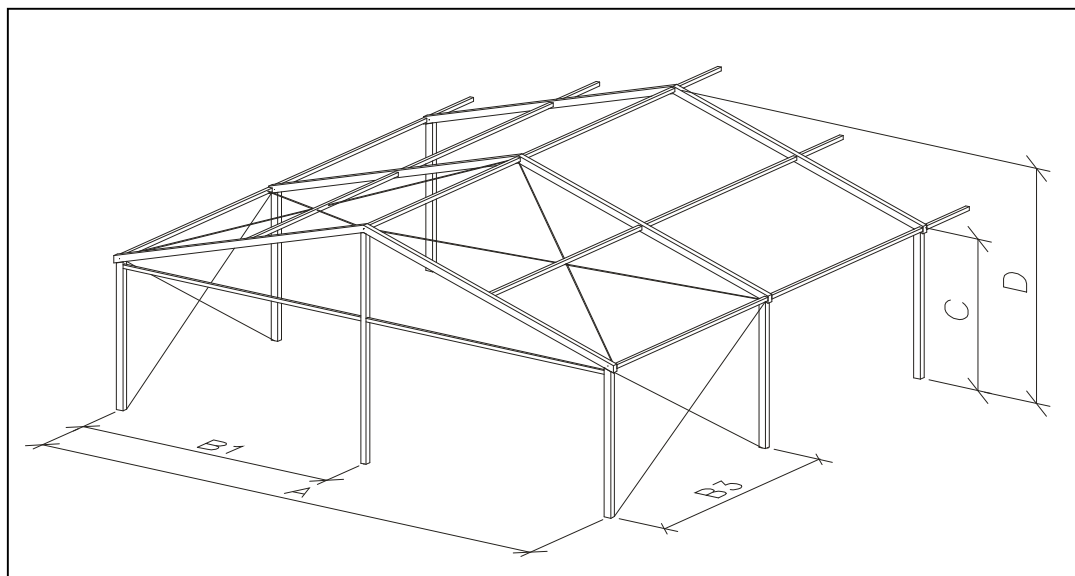

System Measures

Width	(A)	11.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.04 m
Gable truss	(B1)	5.51 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.98 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex plus Party and Exhibition Hall

Type: 11.2/340 · Model: 670

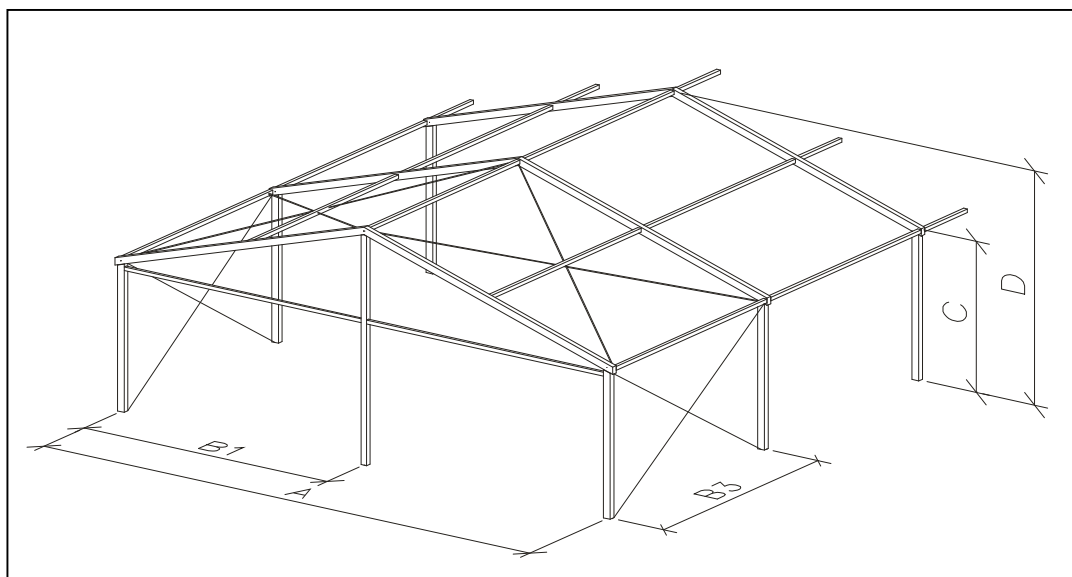

System Measures

Width	(A)	11.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.04 m
Gable truss	(B1)	5.51 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.98 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 12.2/280 · Model: 485

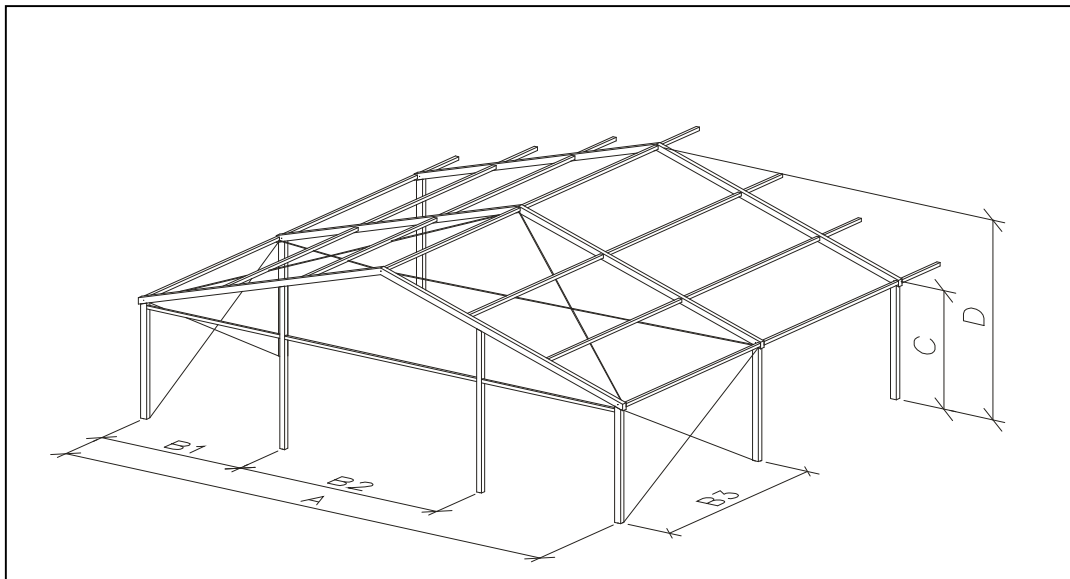

System Measures

Width	(A)	12.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	4.80 m
Gable truss	(B1)	3.51 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.51 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex plus Party and Exhibition Hall

Type: 12.2/280 · Model: XXX

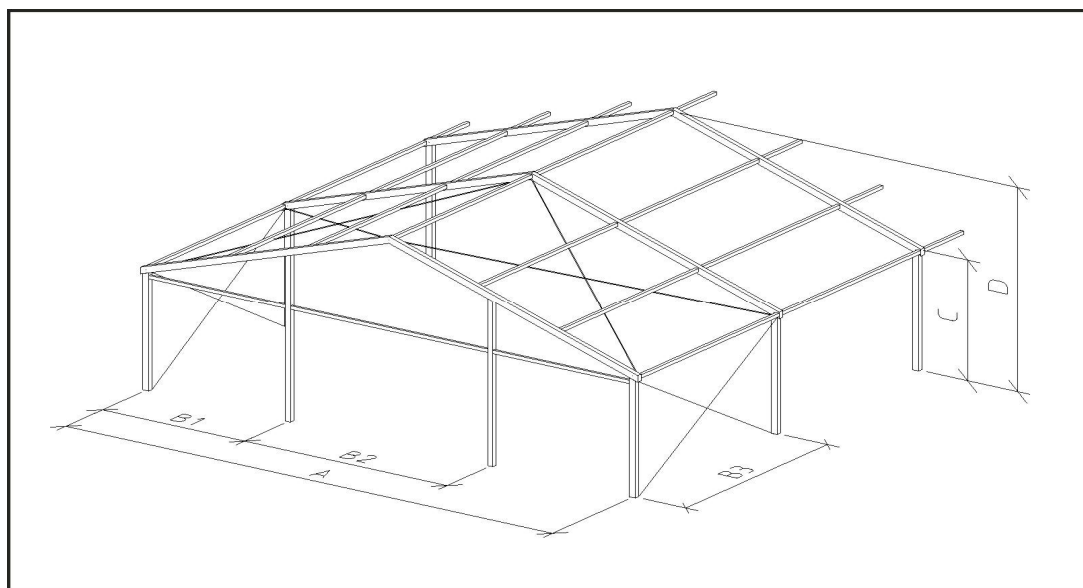

System Measures

Width	(A)	12.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	4.80 m
Gable truss	(B1)	3.51 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.51 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 12.2/340 · Model: 486

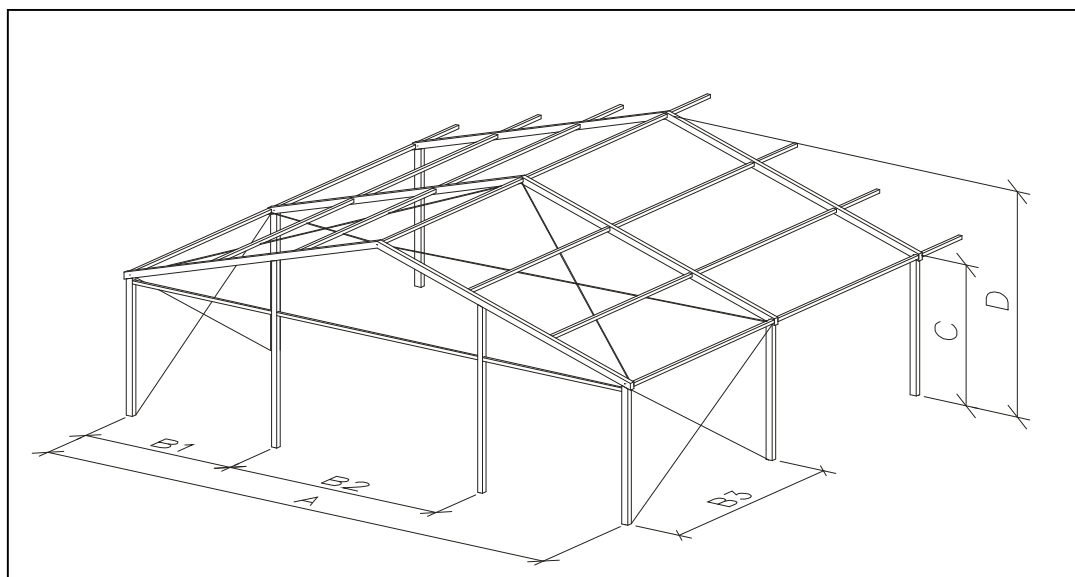

System Measures

Width	(A)	12.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.20 m
Gable truss	(B1)	3.51 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.51 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex plus Party and Exhibition Hall

Type: 12.2/340 · Model: 671

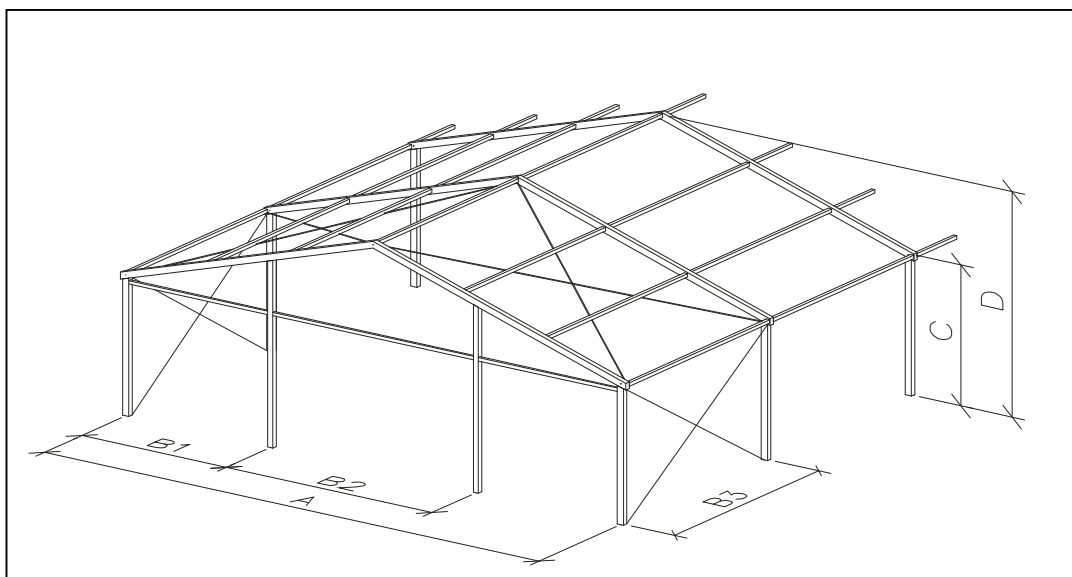

System Measures

Width	(A)	12.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.20 m
Gable truss	(B1)	3.51 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.51 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 15.2/280 · Model: 487

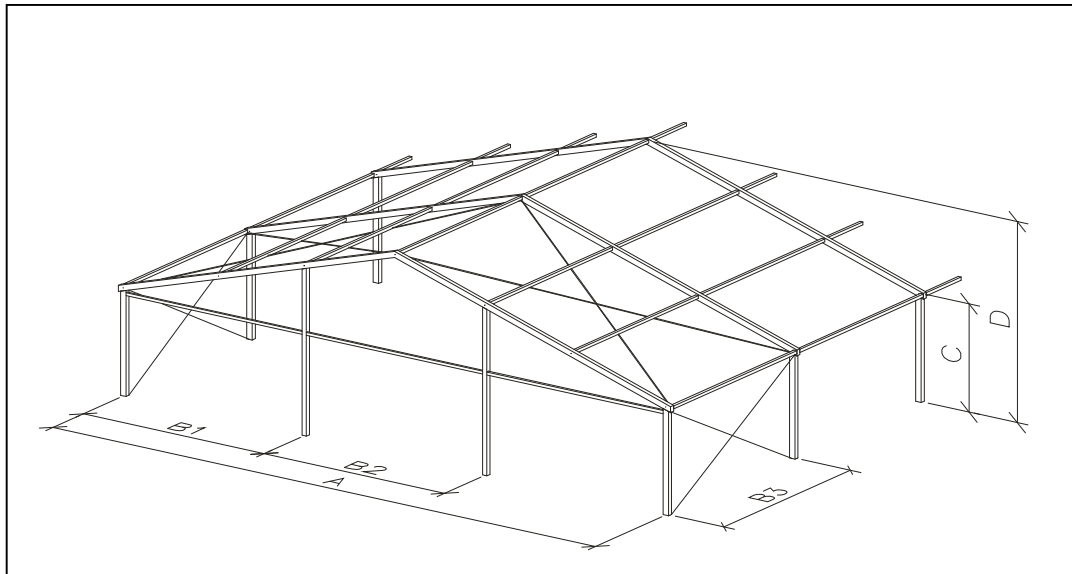

System Measures

Width	(A)	15.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	5.29 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex plus Party and Exhibition Hall

Type: 15.2/280 · Model: XXX

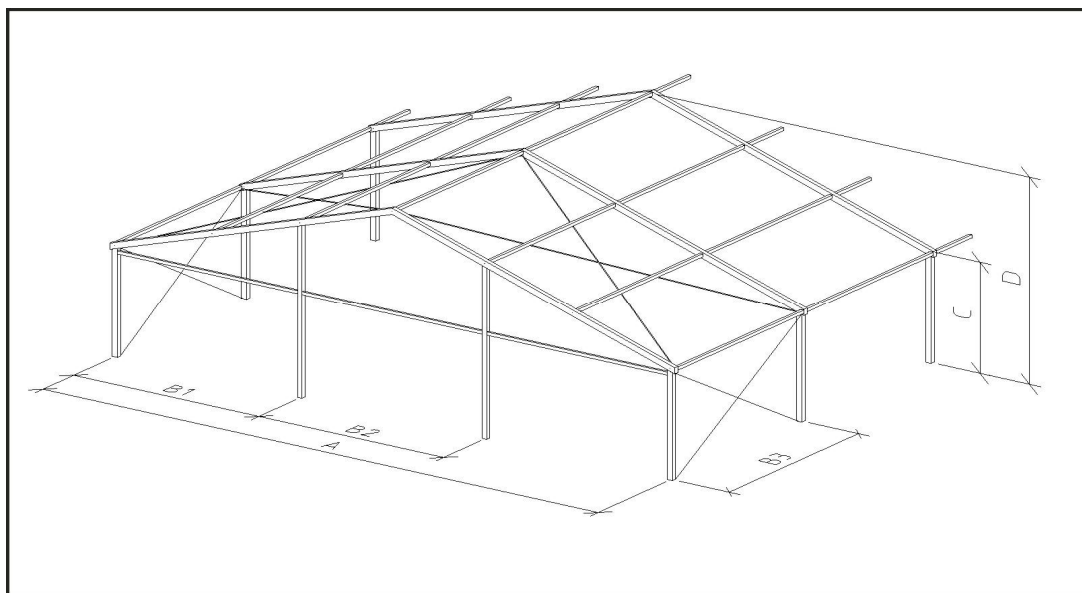

System Measures

Width	(A)	15.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	5.29 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 15.2/340 · Model: 488

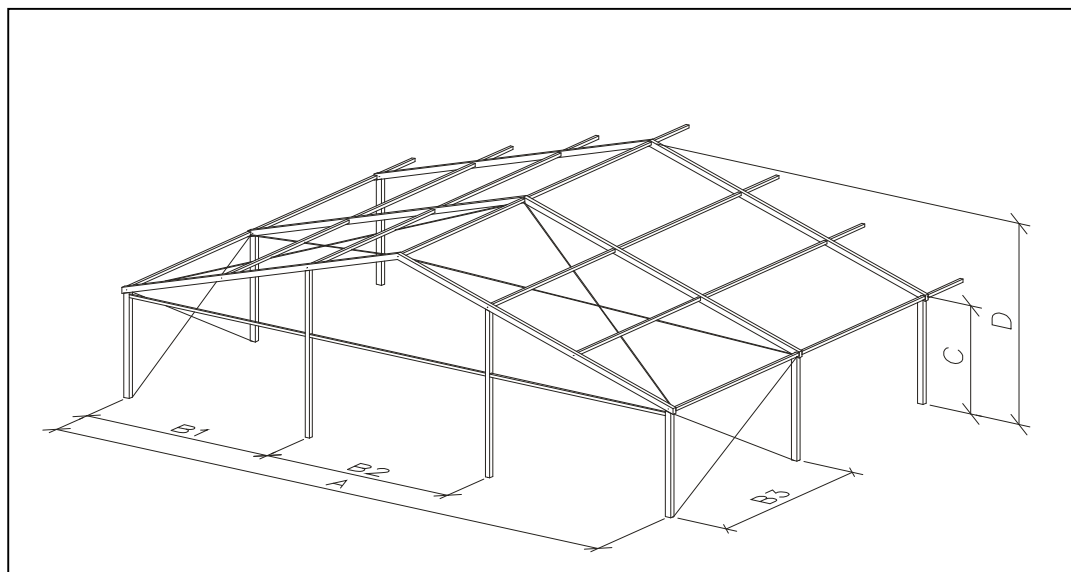

System Measures

Width	(A)	15.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.69 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



Version 2015

easyflex plus Party and Exhibition Hall

Type: 15.2/340 · Model: 672

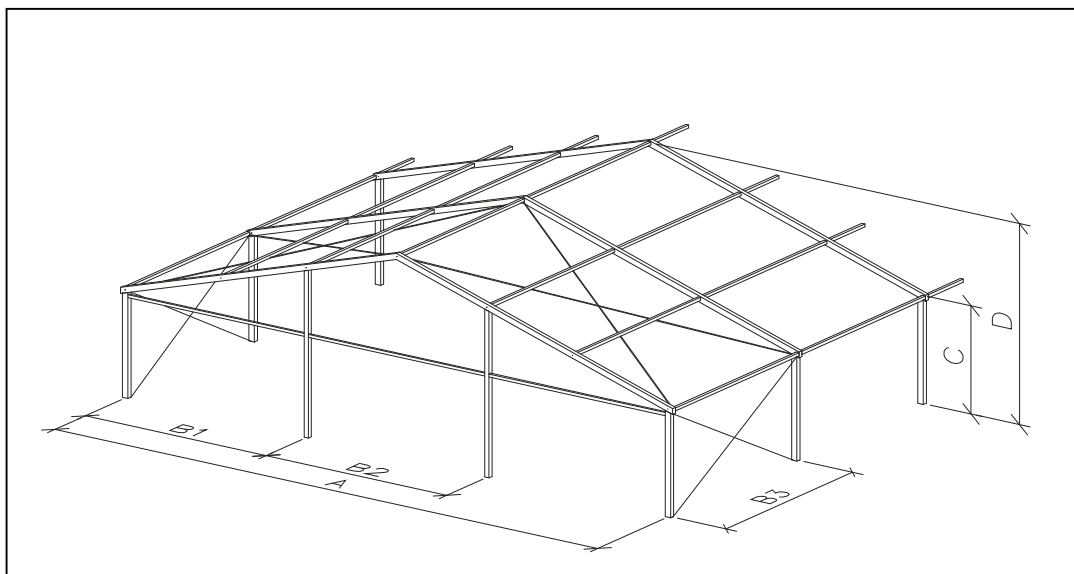

System Measures

Width	(A)	15.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.69 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 18.2/280 · Model: 587

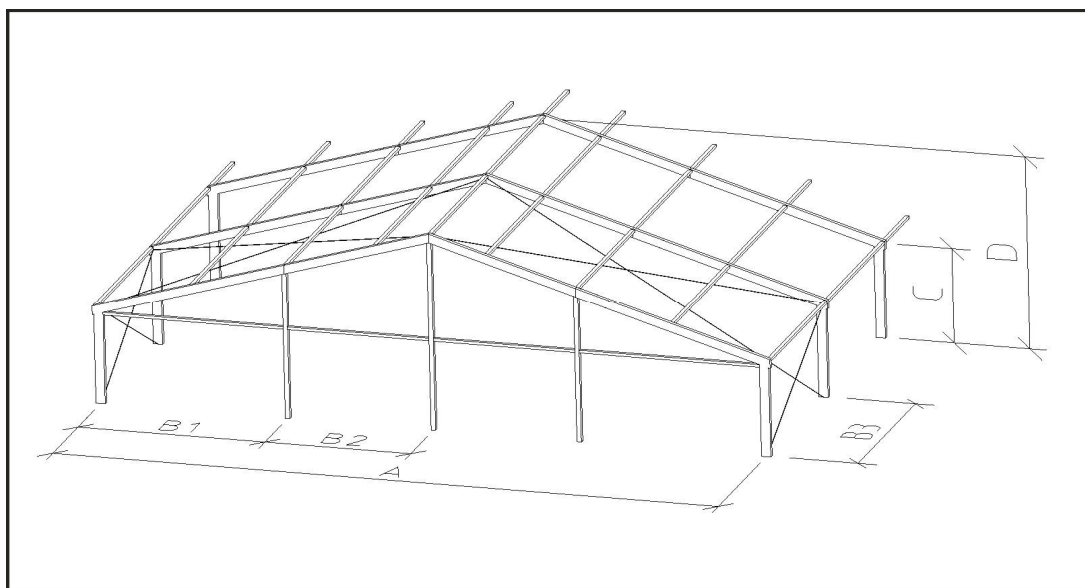

System Measures

Width	(A)	18.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	6.38 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	4.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		9.61 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



easyflex Party and Exhibition Hall

Type: 18.2/340 · Model: 588

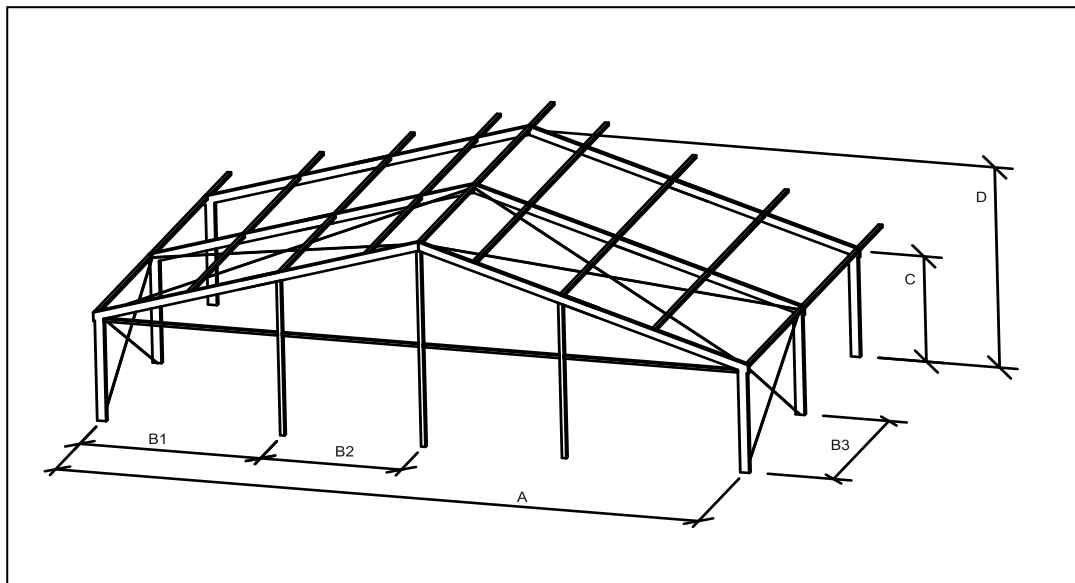

System Measures

Width	(A)	18.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.98 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	4.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		9.61 m
Truss profile		150 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com

