


uniflex Party and Exhibition Hall

Type: 8.3/280 · Model: 718

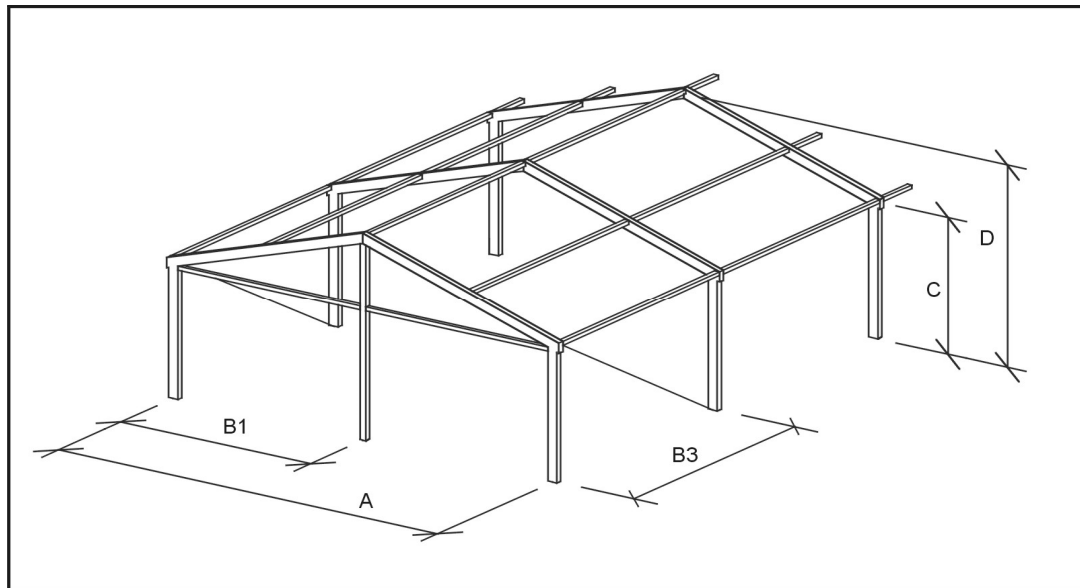

System Measures

Width	(A)	8.28 m
Eave height	(C)	2.84 m
Ridge height	(D)	4.19 m
Gable truss	(B1)	4.14 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.60 m
Truss profile		200 x120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 8.3/340 · Model: 686

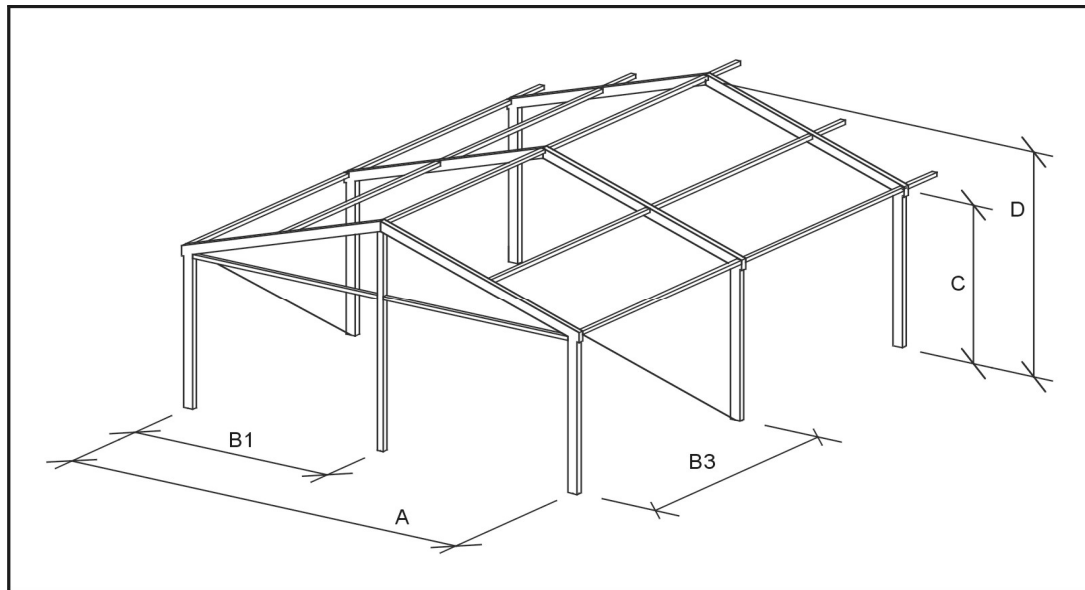

System Measures

Width	(A)	8.28 m
Eave height	(C)	3.24 m
Ridge height	(D)	4.59 m
Gable truss	(B1)	4.14 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.80 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 8.3/400 · Model: 695

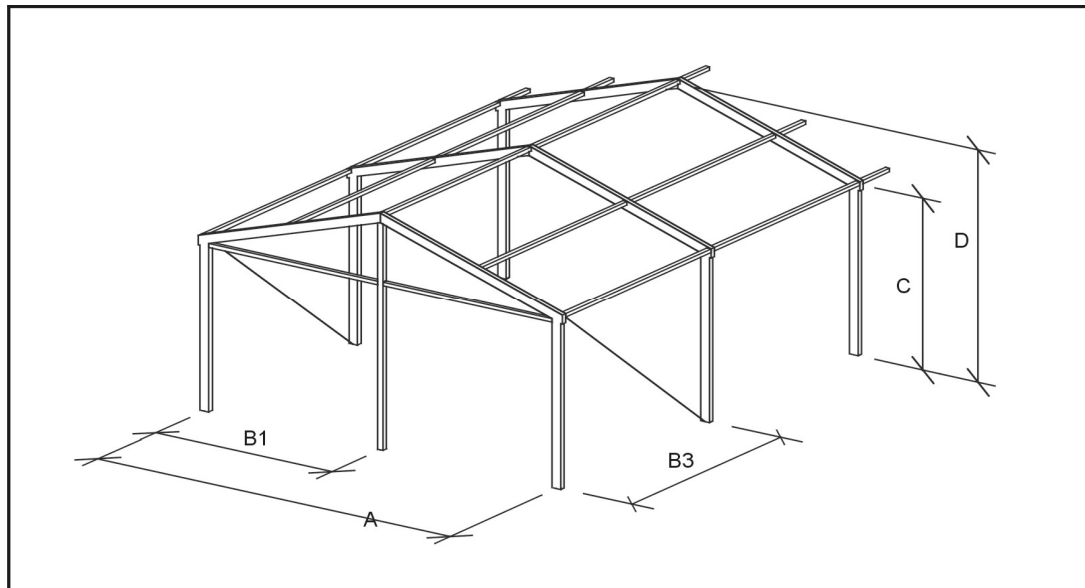

System Measures

Width	(A)	8.28 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.19 m
Gable truss	(B1)	4.14 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.20 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 8.3/540 · Model: 739

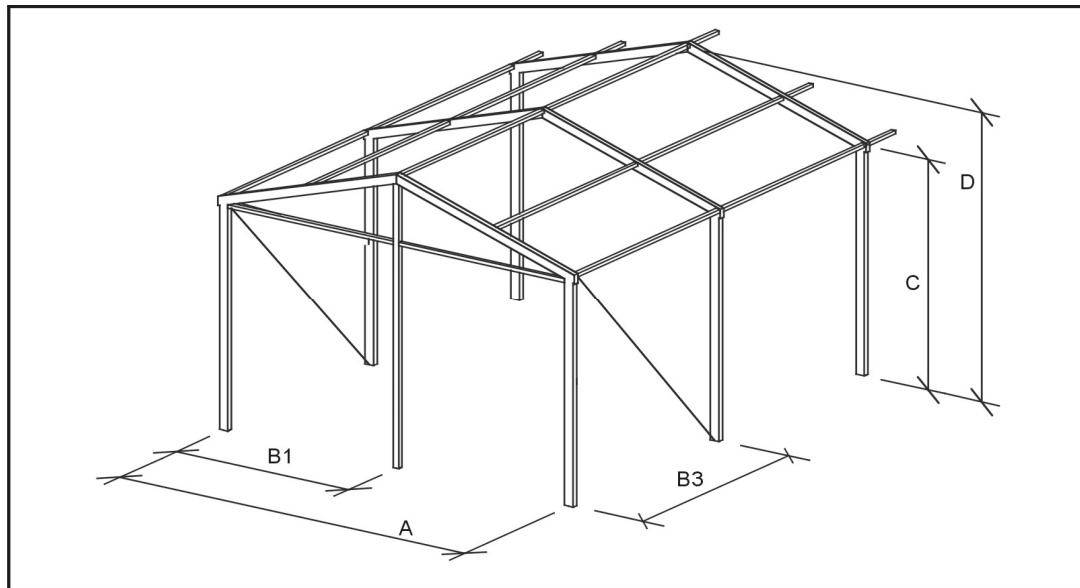

System Measures

Width	(A)	8.28 m
Eave height	(C)	5.24 m
Ridge height	(D)	6.59 m
Gable truss	(B1)	4.14 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.46 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 10.3/280 · Model: 348

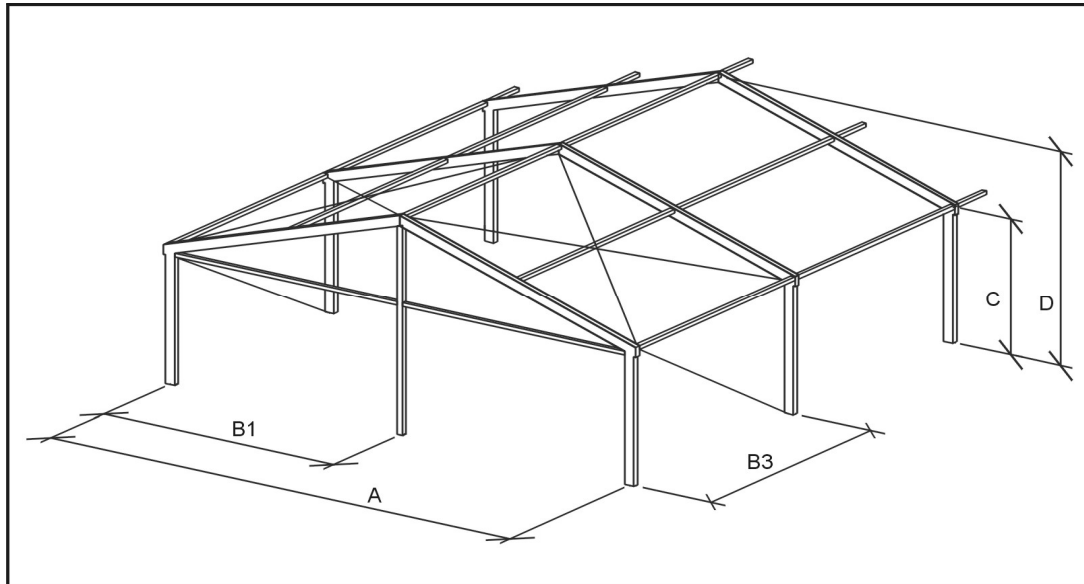

System Measures

Width	(A)	10.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	4.47 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.46 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: info@losbergerus.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 10.3/340 · Model: 349

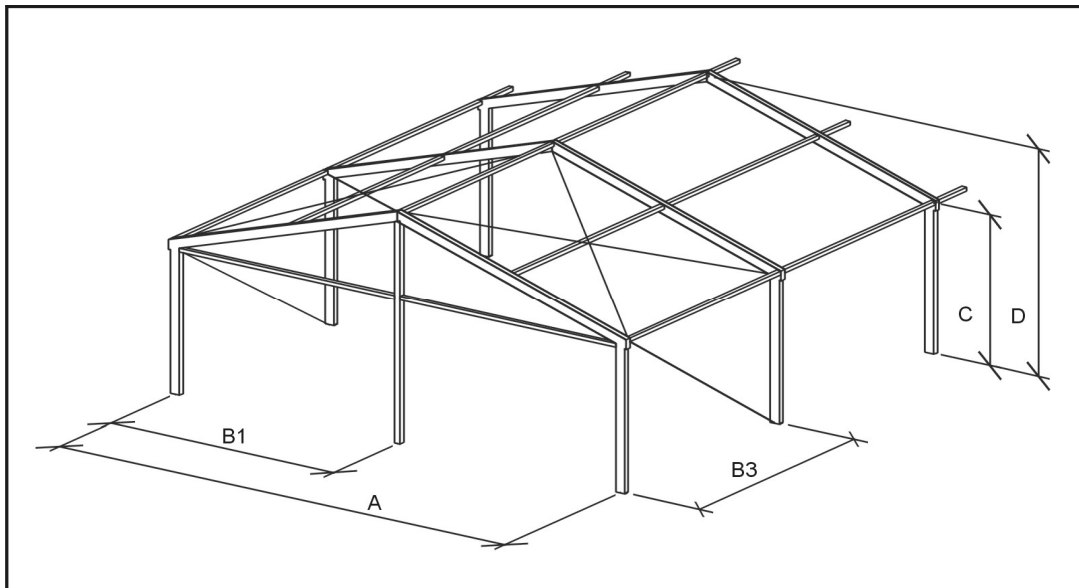

System Measures

Width	(A)	10.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	4.87 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.46 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: info@losbergerus.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 10.3/400 · Model: 350

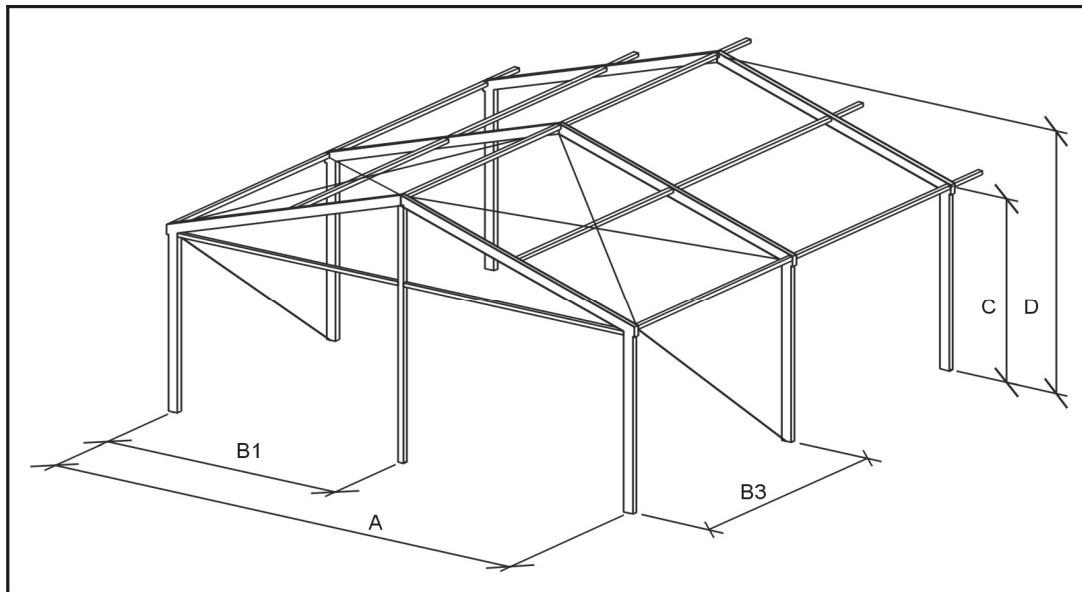

System Measures

Width	(A)	10.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.47 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.02 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: info@losbergerus.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 10.3/540 · Model: 738

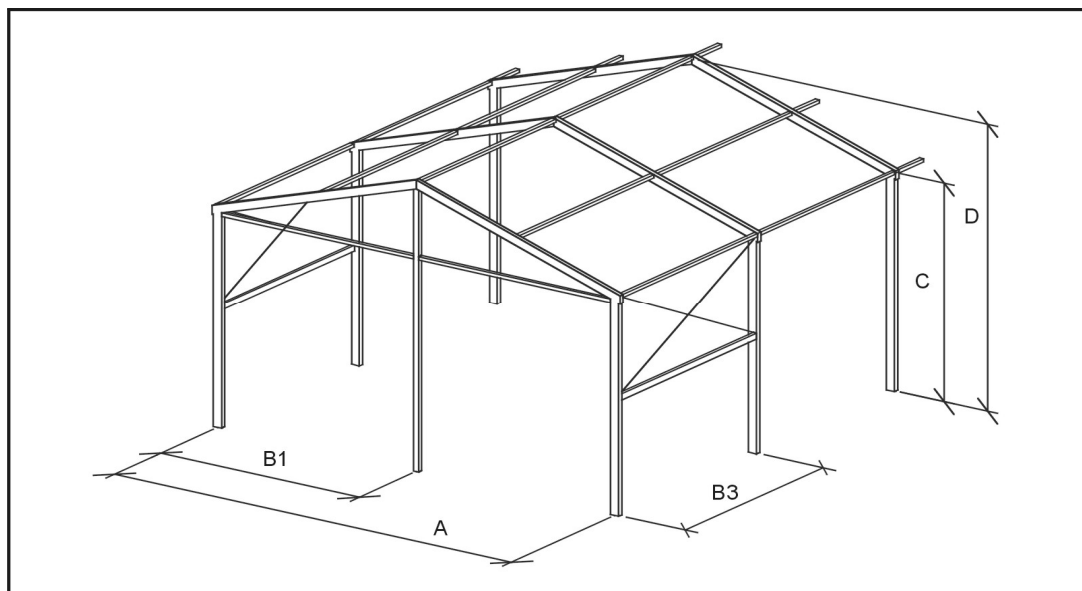

System Measures

Width	(A)	10.08 m
Eave height	(C)	5.24 m
Ridge height	(D)	6.88 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.75 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: info@losbergerus.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 11.3/280 · Model: 434

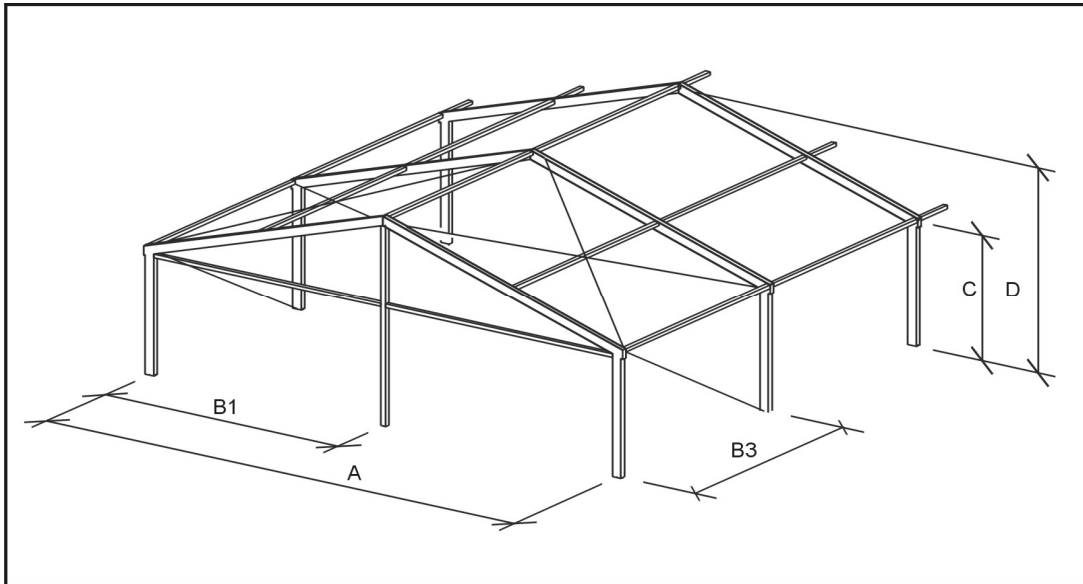

System Measures

Width	(A)	11.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	4.64 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.89 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 11.3/340 · Model: 435

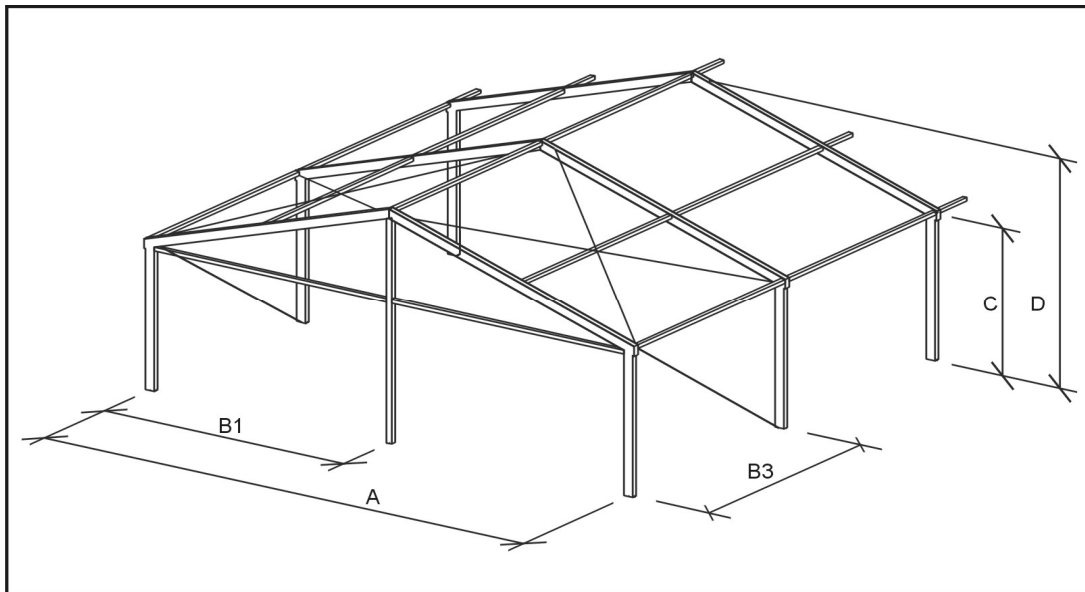

System Measures

Width	(A)	11.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.04 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.89 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 11.3/400 · Model: 436

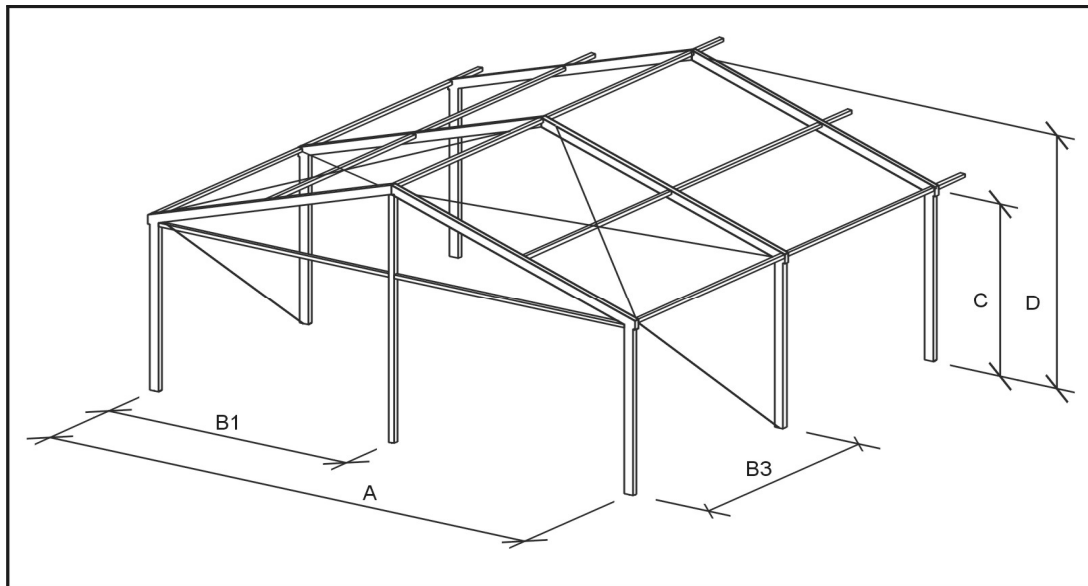

System Measures

Width	(A)	11.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.64 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.89 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 12.3/280 · Model: 298

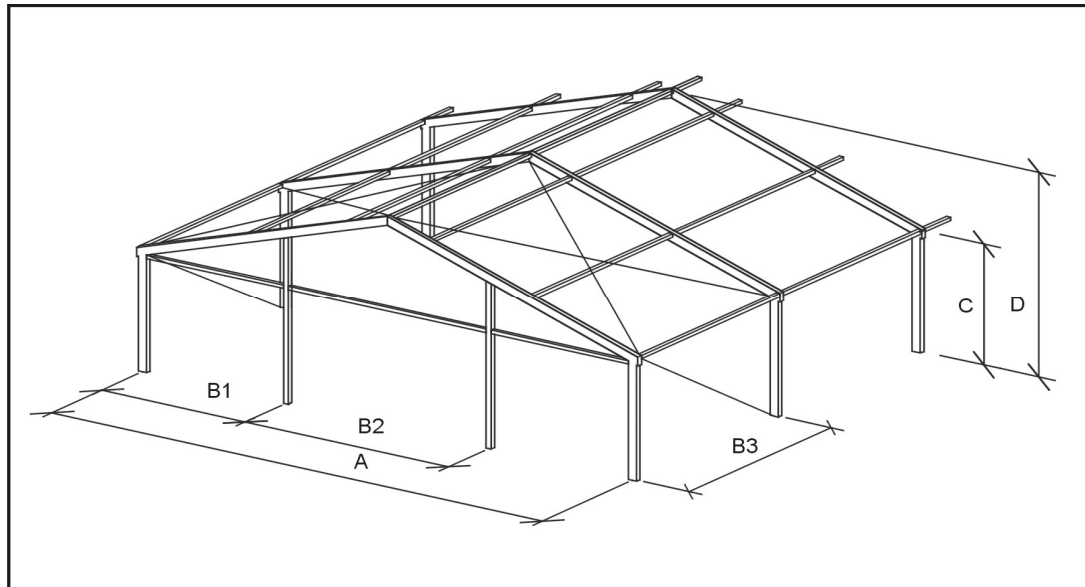

System Measures

Width	(A)	12.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	4.80 m
Gable truss	(B1)	3.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.50 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!


Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



Version 2015

uniflex Party and Exhibition Hall

Type: 12.3/340 · Model: 297

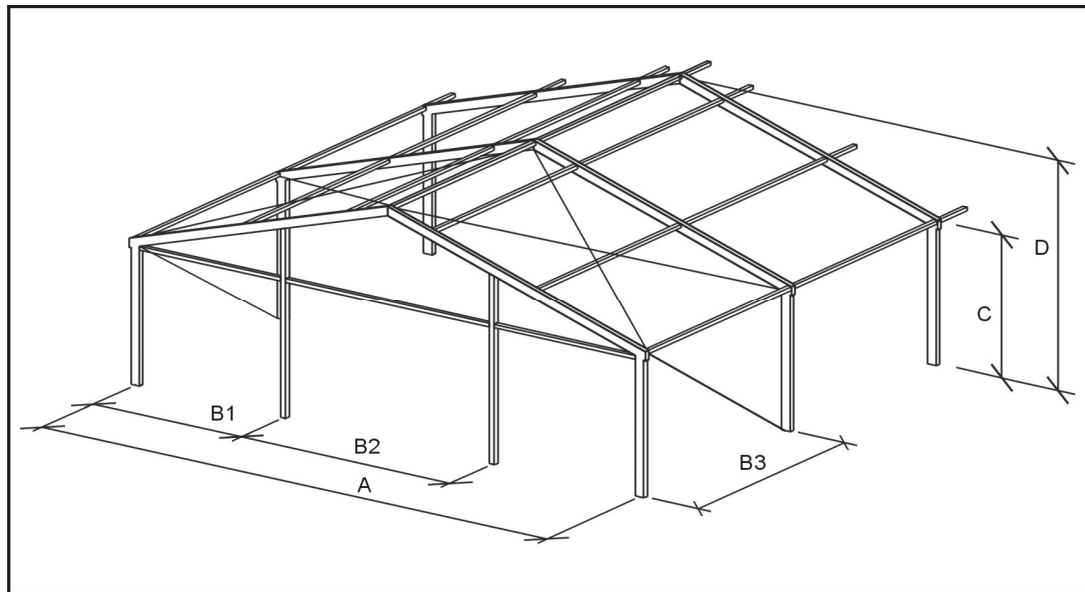

System Measures

Width	(A)	12.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.20 m
Gable truss	(B1)	3.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.50 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 12.3/400 · Model: 296

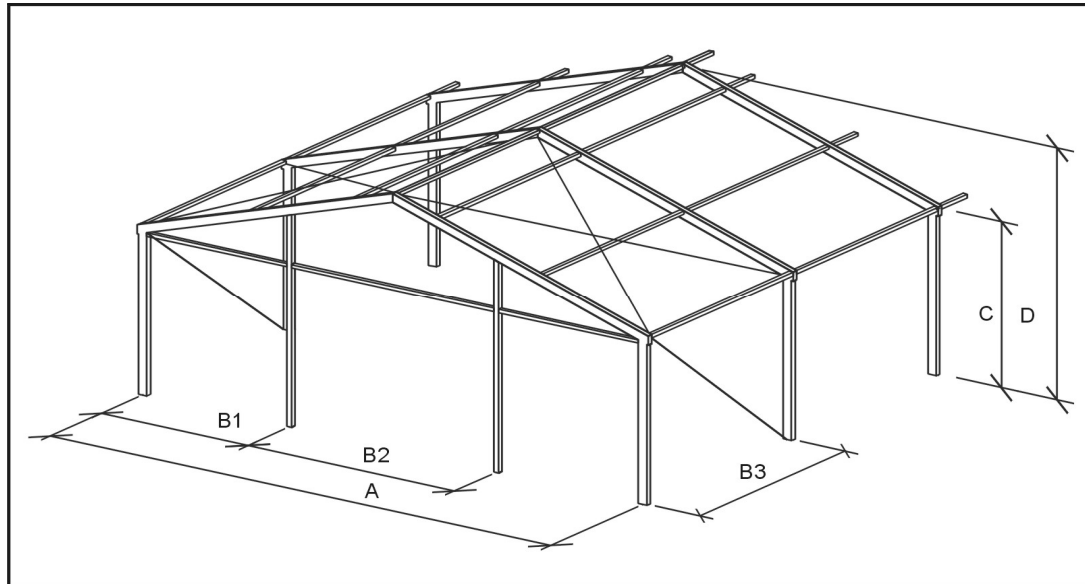

System Measures

Width	(A)	12.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	5.80 m
Gable truss	(B1)	3.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.50 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 15.3/280 · Model: 241

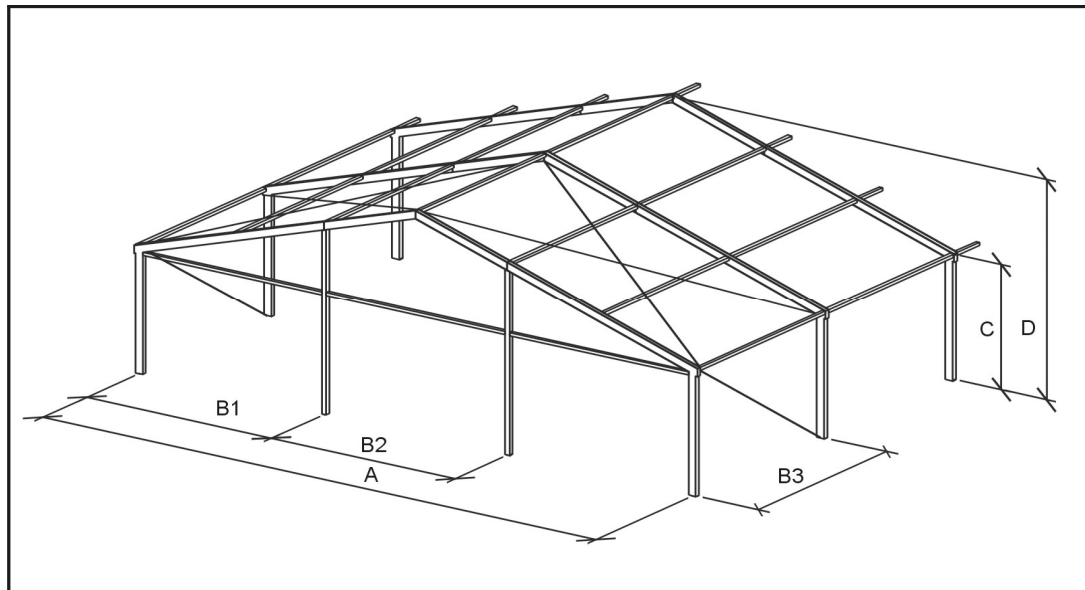

System Measures

Width	(A)	15.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	5.28 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 15.3/340 · Model: 242

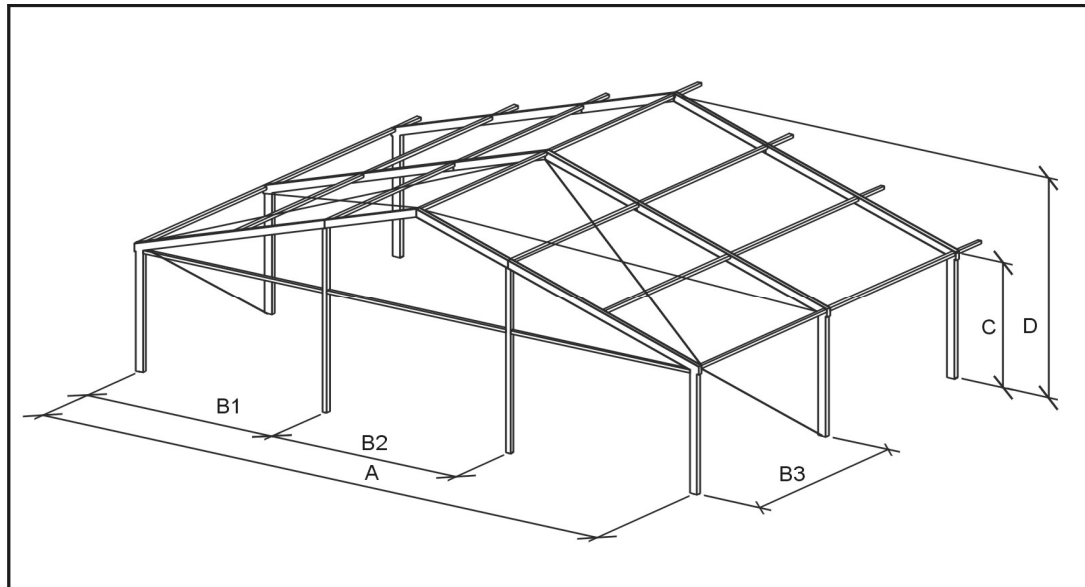

System Measures

Width	(A)	15.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.68 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 15.3/400 · Model: 243

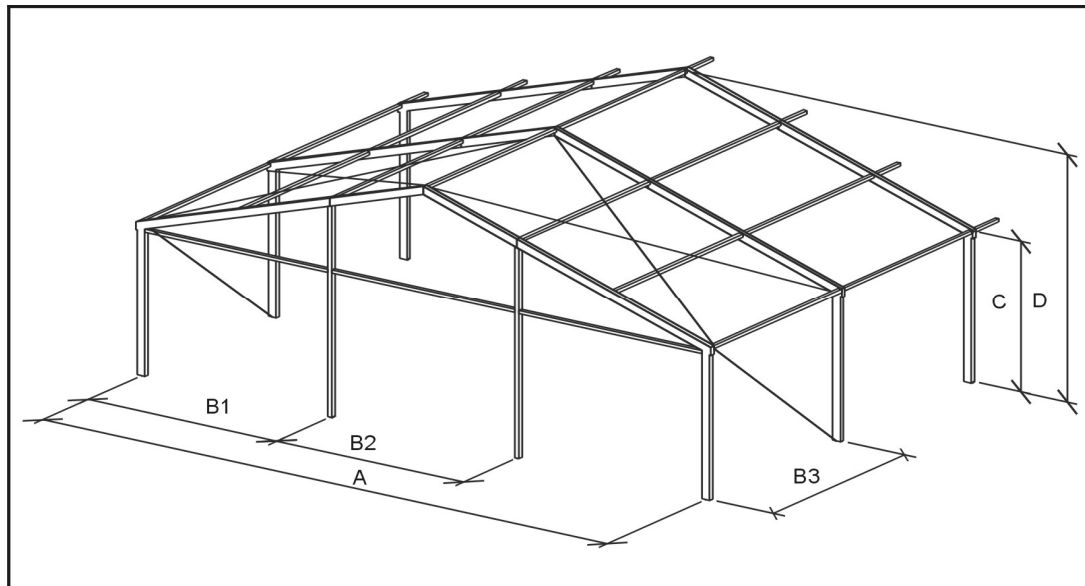

System Measures

Width	(A)	15.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	6.28 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 15.4/280 · Model: 731

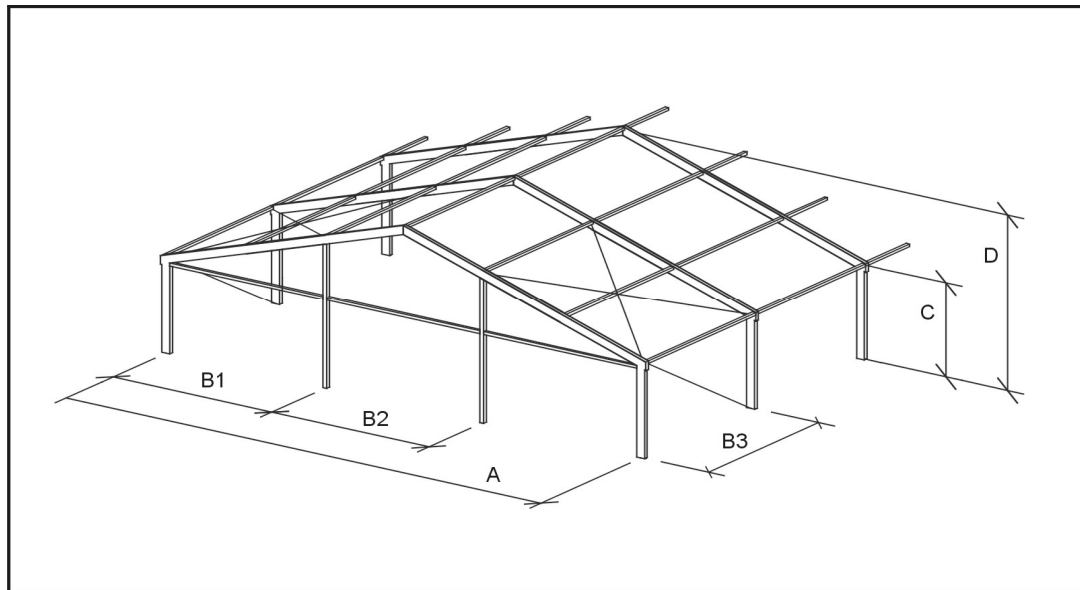

System Measures

Width	(A)	15.13 m
Eave height	(C)	2.85 m
Ridge height	(D)	5.31 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.95 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 15.4/340 · Model: 725

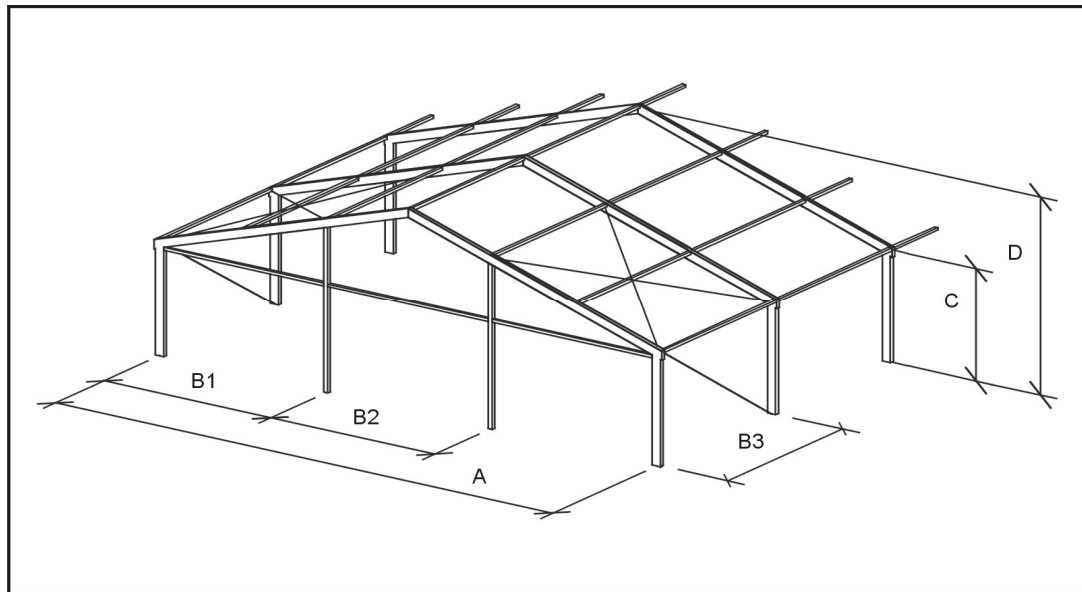

System Measures

Width	(A)	15.13 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.71 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.95 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 15.4/400 · Model: 735

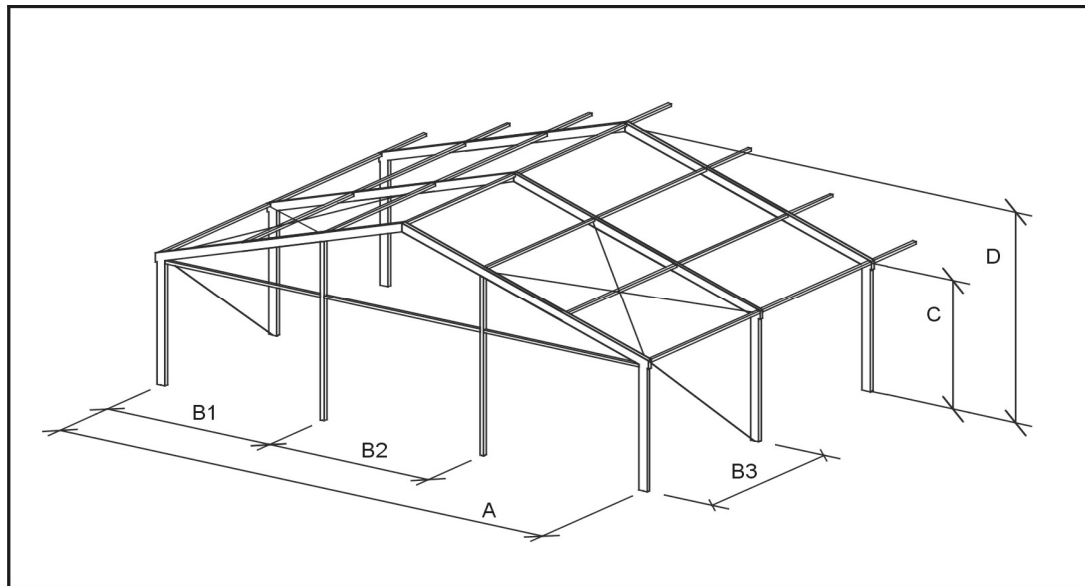

System Measures

Width	(A)	15.13 m
Eave height	(C)	3.85 m
Ridge height	(D)	6.31 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.95 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 16.3/280 · Model: 244

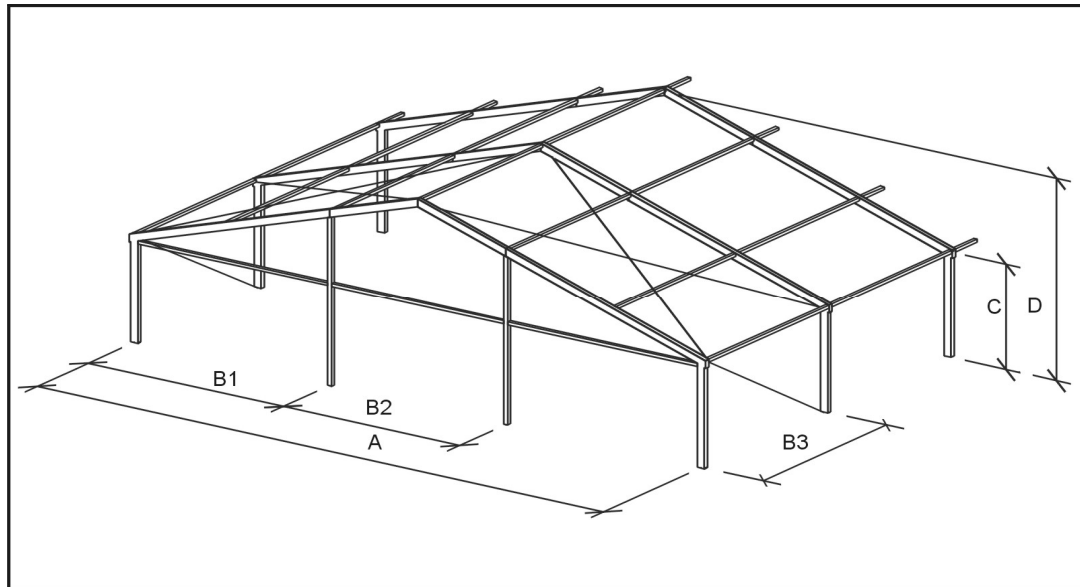

System Measures

Width	(A)	16.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	5.45 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.61 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 16.3/340 · Model: 245

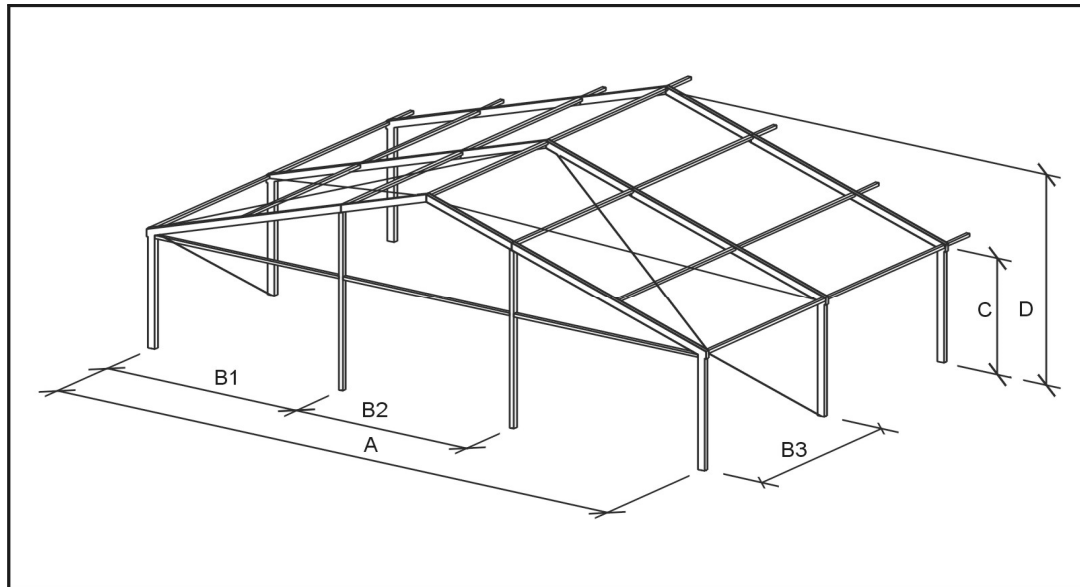

System Measures

Width	(A)	16.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	5.85 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.61 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 16.3/400 · Model: 246

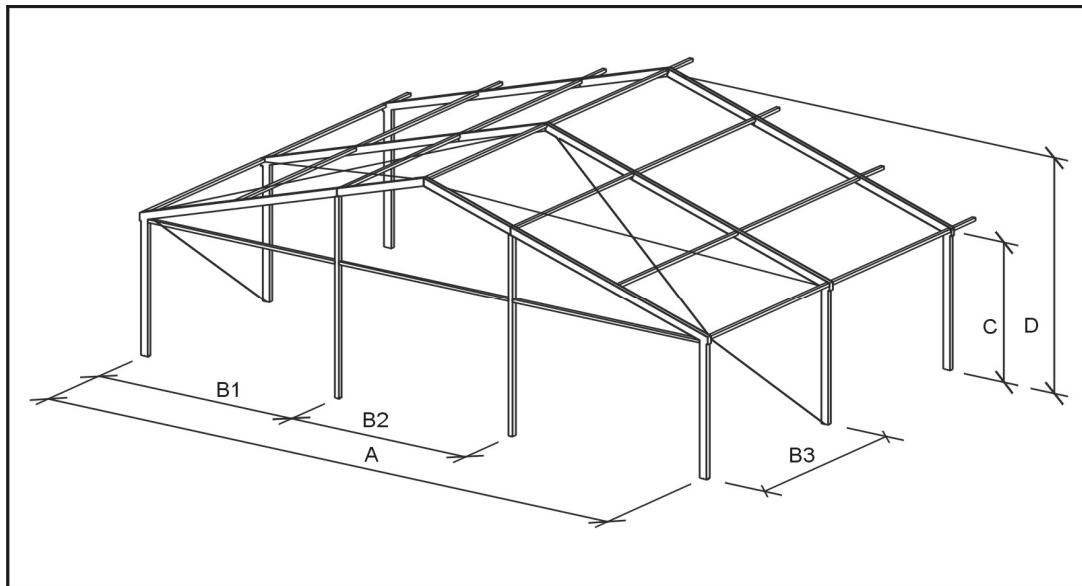

System Measures

Width	(A)	16.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	6.45 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.61 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 18.3/340 · Model: XXX

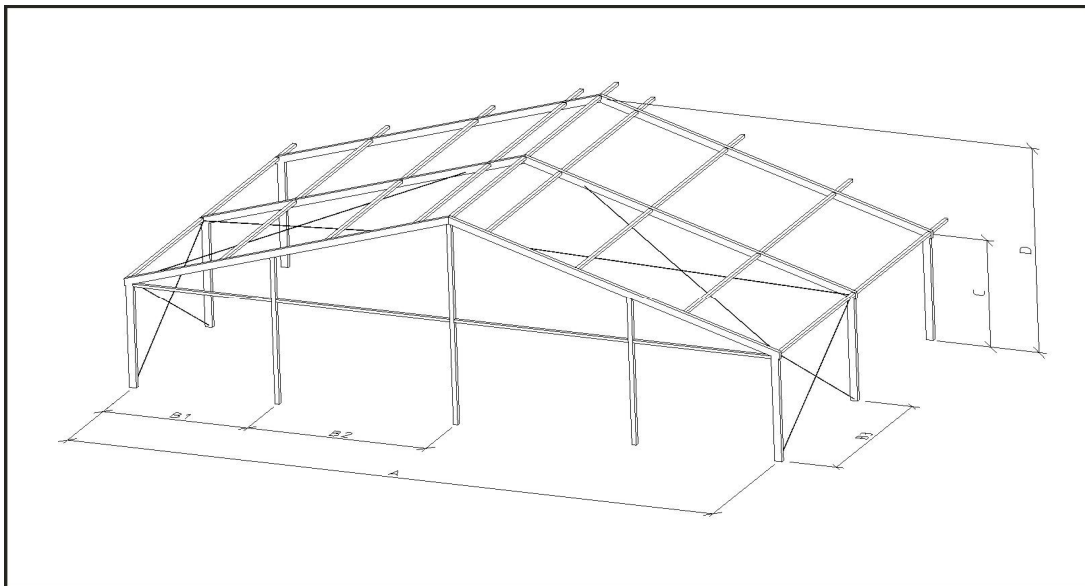

System Measures

Width	(A)	18.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	6.18 m
Gable truss	(B1)	4.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		9.63 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 20.3/280 · Model: 247

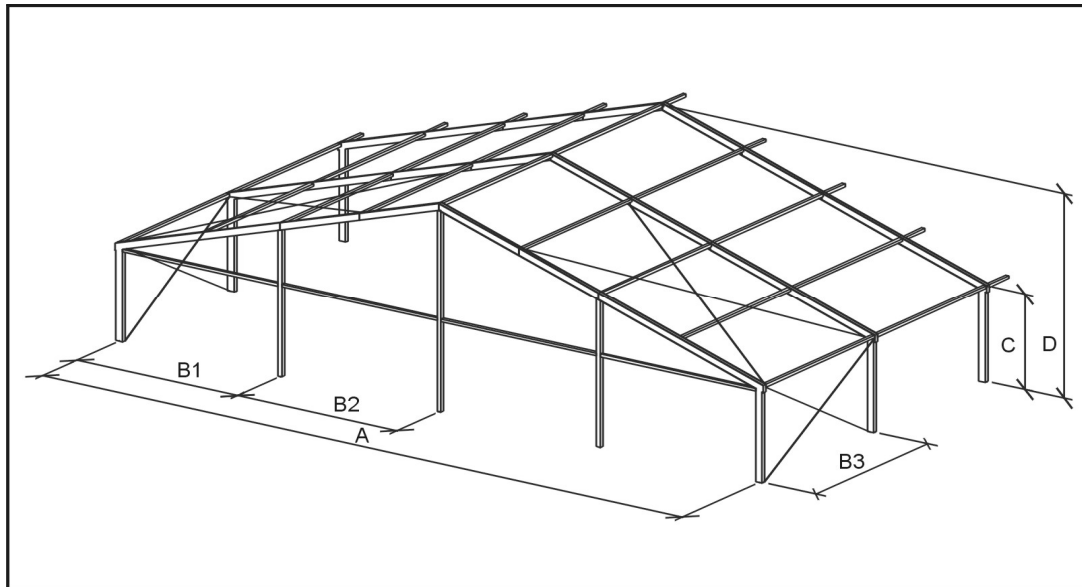

System Measures

Width	(A)	20.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	6.10 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.71 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 20.3/340 · Model: 248

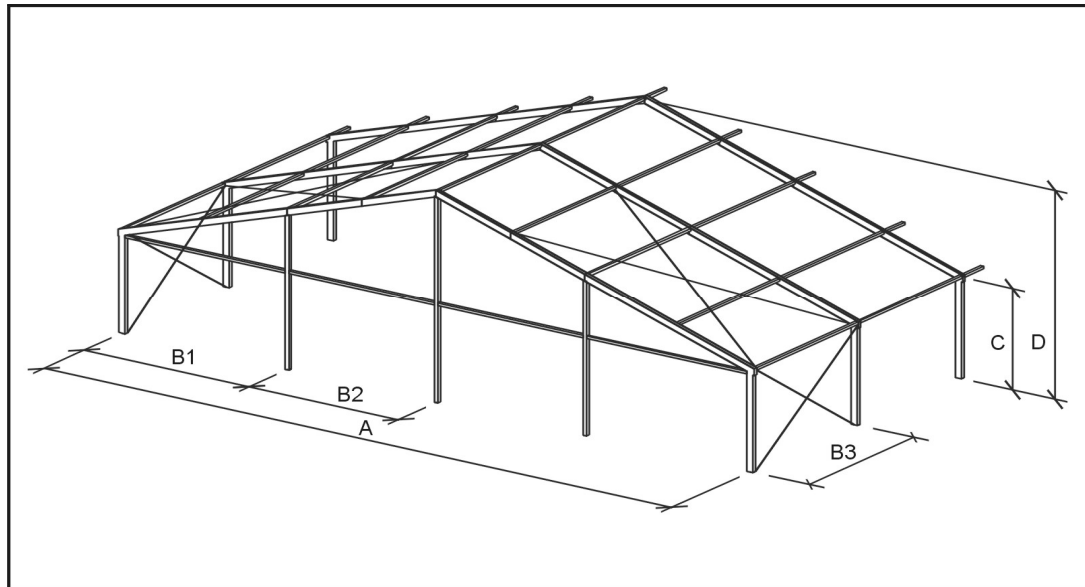

System Measures

Width	(A)	20.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	6.50 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.71 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 20.3/400 · Model: 249

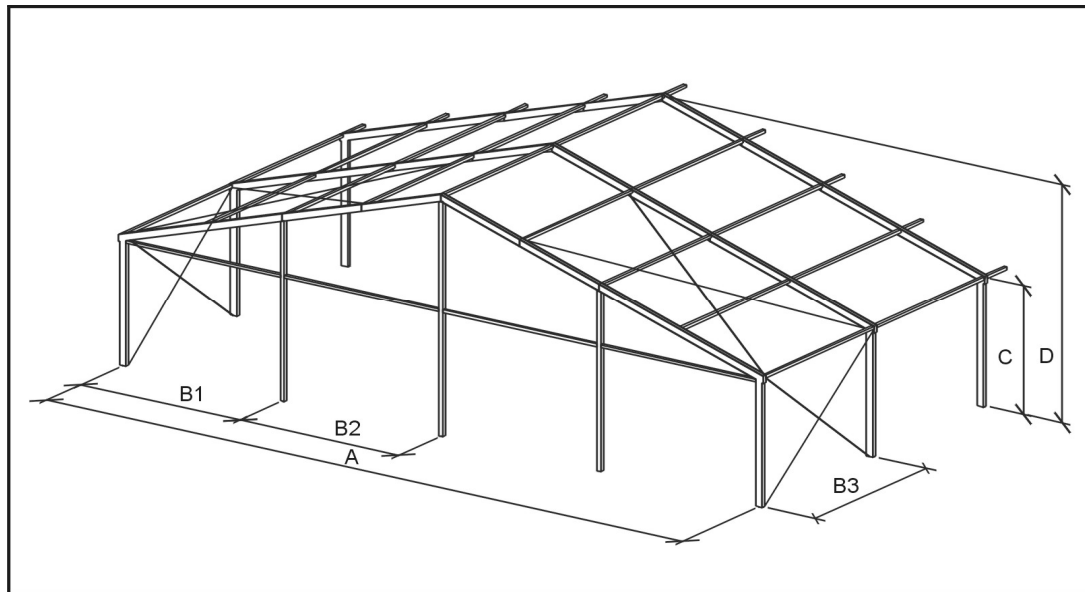

System Measures

Width	(A)	20.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.10 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.71 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 20.4/280 · Model: 351

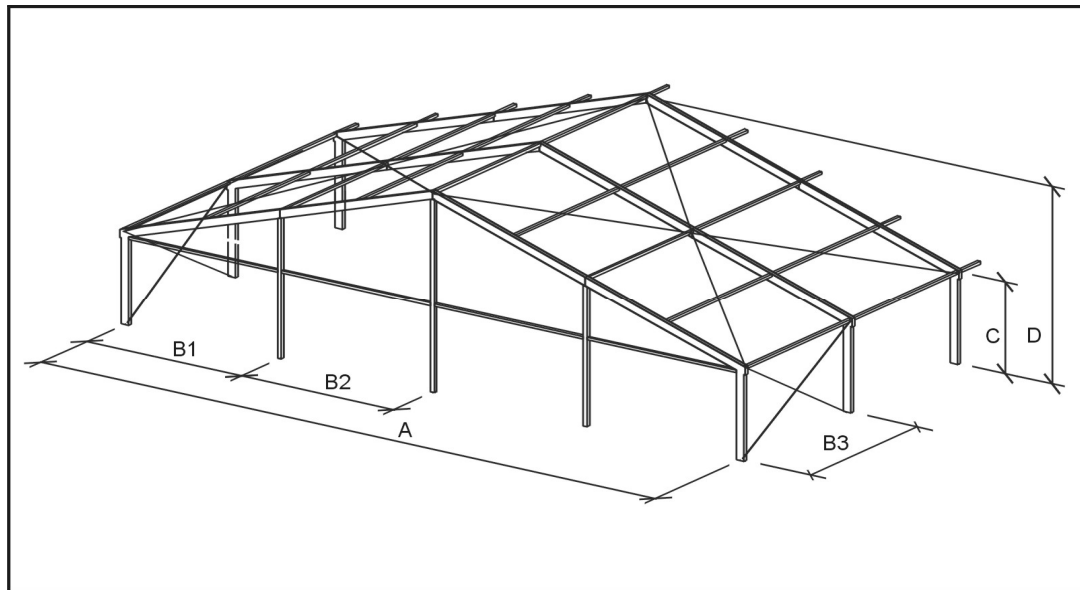

System Measures

Width	(A)	20.13 m
Eave height	(C)	2.85 m
Ridge height	(D)	6.12 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 20.4/340 · Model: 352

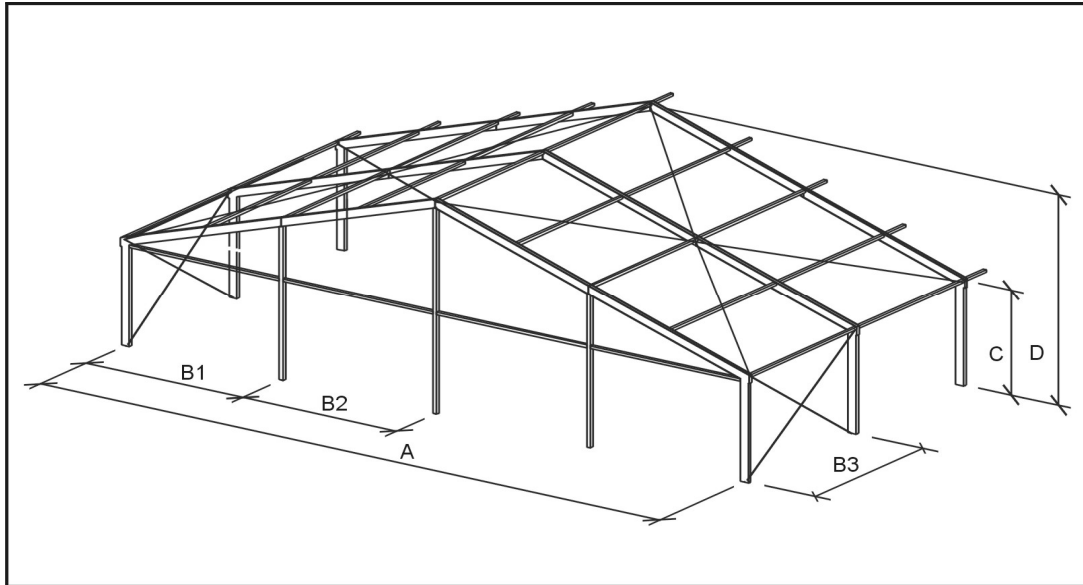

System Measures

Width	(A)	20.13 m
Eave height	(C)	3.25 m
Ridge height	(D)	6.52 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 20.4/400 · Model: 353

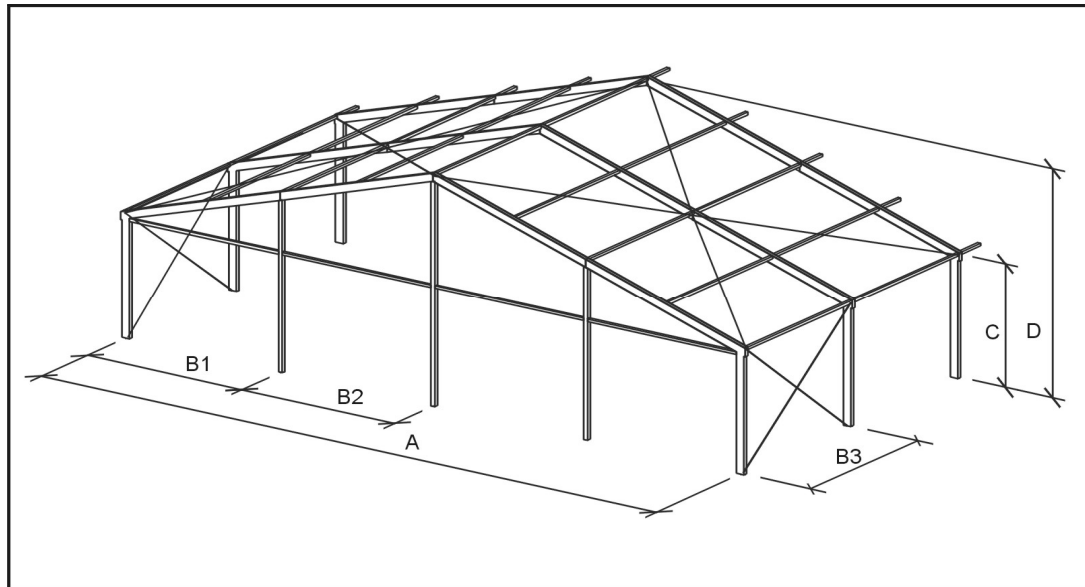

System Measures

Width	(A)	20.13 m
Eave height	(C)	3.85 m
Ridge height	(D)	7.12 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 21.3/280 · Model: 250

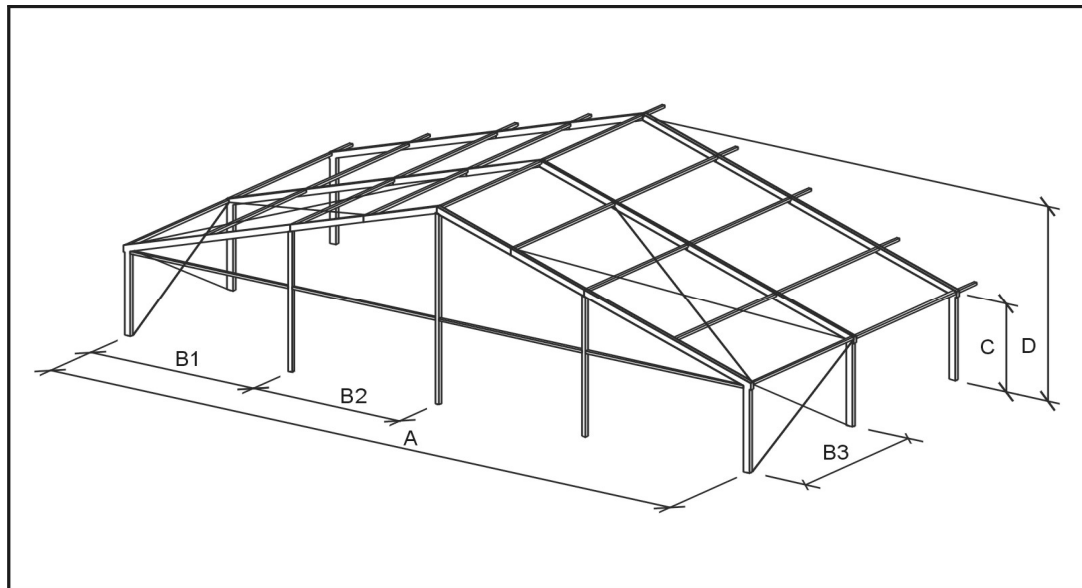

System Measures

Width	(A)	21.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	6.26 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		11.20 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 21.3/340 · Model: 251

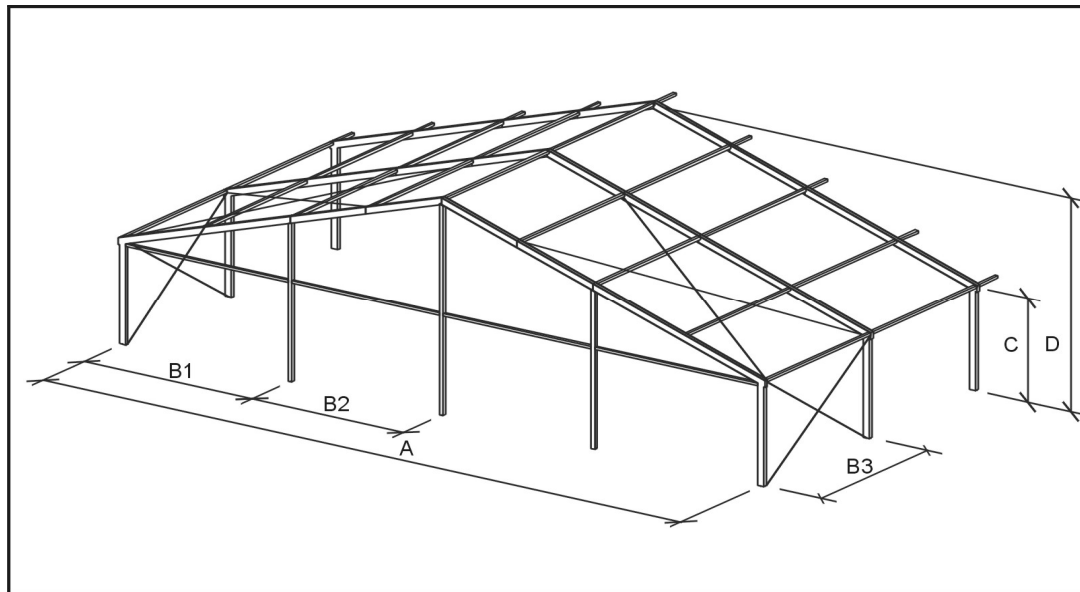

System Measures

Width	(A)	21.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	6.66 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		11.20 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 21.3/400 · Model: 252

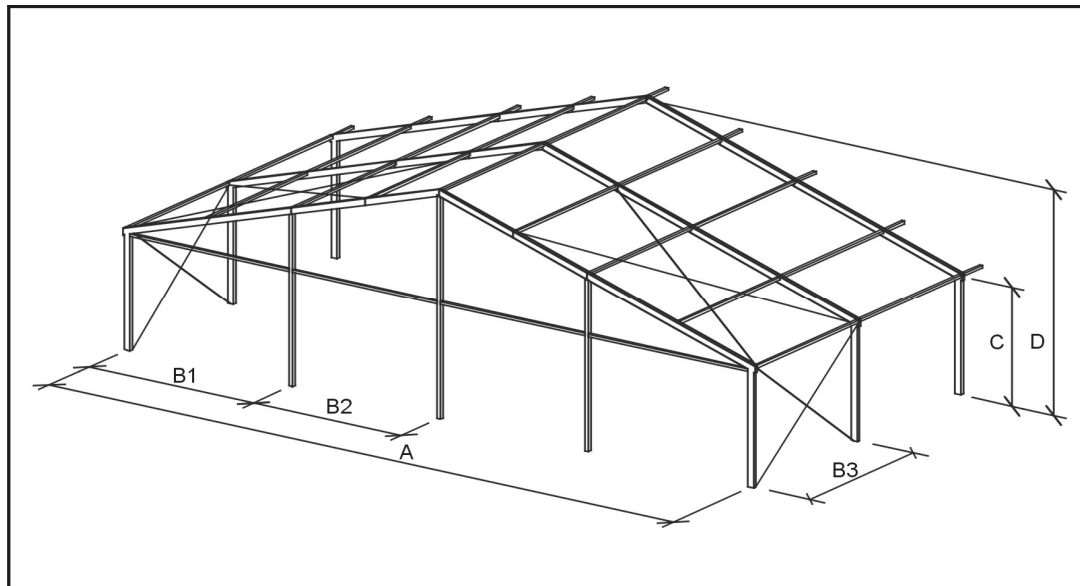

System Measures

Width	(A)	21.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.26 m
Gable truss	(B1)	5.54 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		11.20 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 10.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 25.3/280 · Model: 253

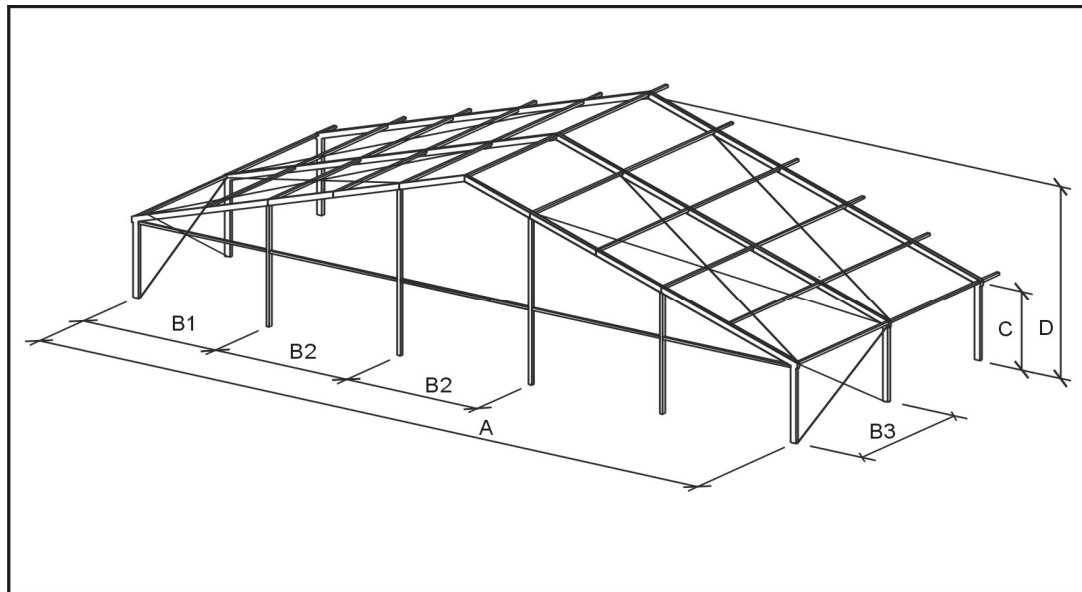

System Measures

Width	(A)	25.08 m
Eave height	(C)	2.84 m
Ridge height	(D)	6.91 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 25.3/340 · Model: 254

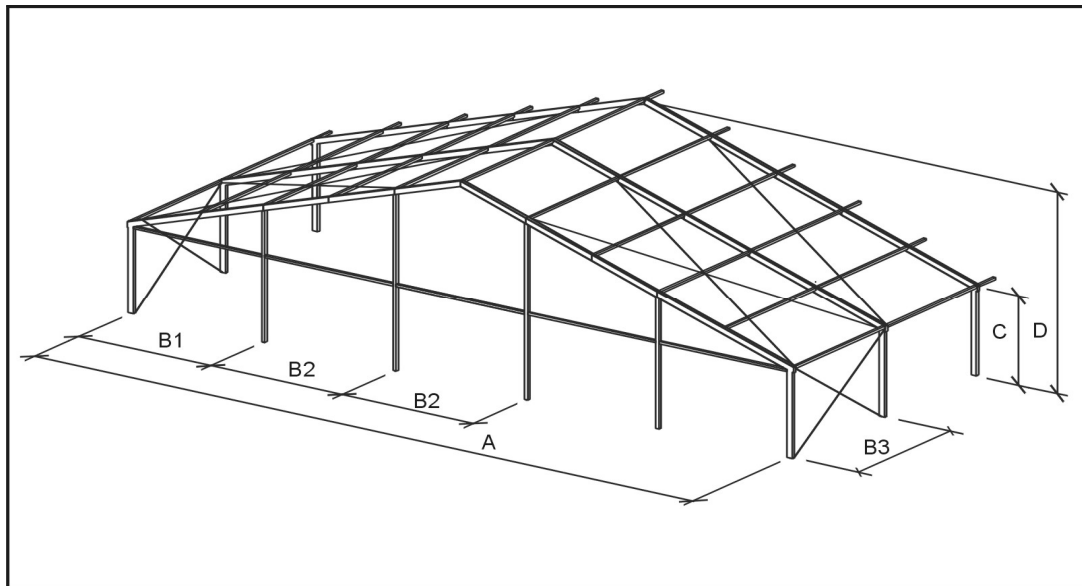

System Measures

Width	(A)	25.08 m
Eave height	(C)	3.24 m
Ridge height	(D)	7.31 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 25.3/400 · Model: 702

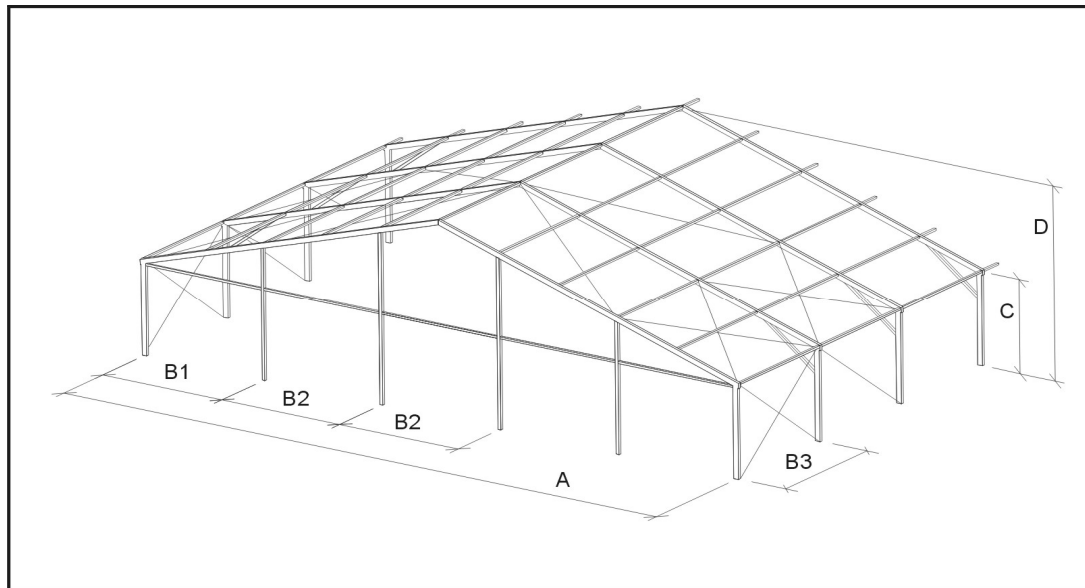

System Measures

Width	(A)	25.08 m
Eave height	(C)	3.84 m
Ridge height	(D)	7.92 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		200 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 25.4/340 · Model: 355

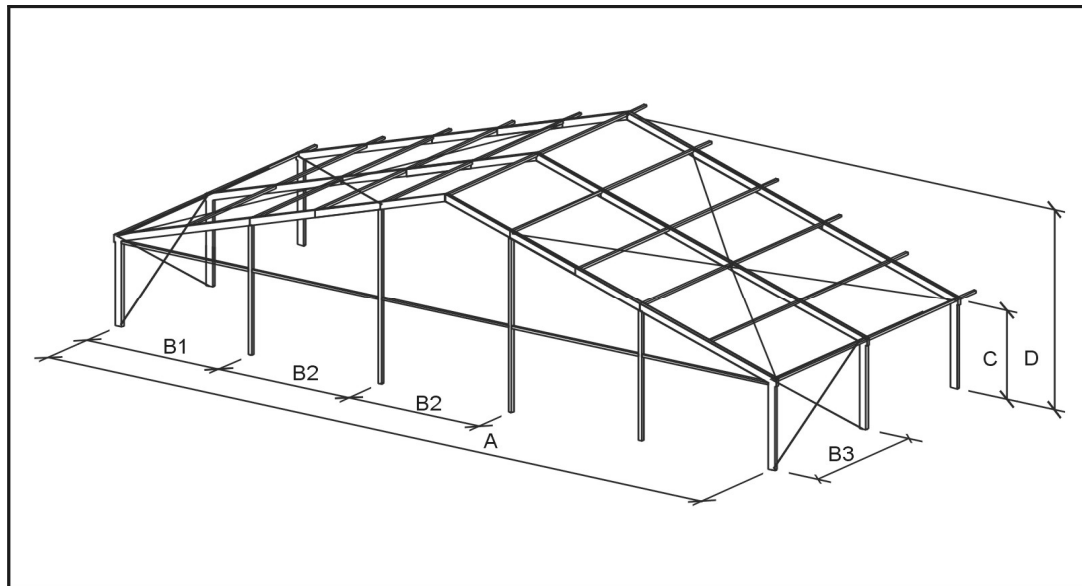

System Measures

Width	(A)	25.13 m
Eave height	(C)	3.25 m
Ridge height	(D)	7.33 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.97 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 25.4/400 · Model: 356

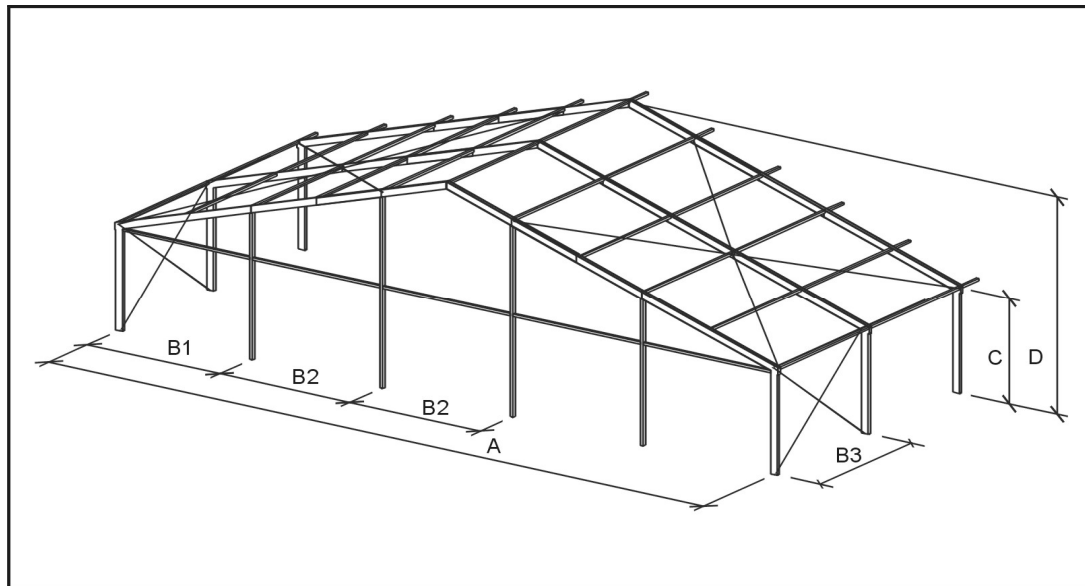

System Measures

Width	(A)	25.13 m
Eave height	(C)	3.85 m
Ridge height	(D)	7.93 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		7.97 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 30.4/280 · Model: 282

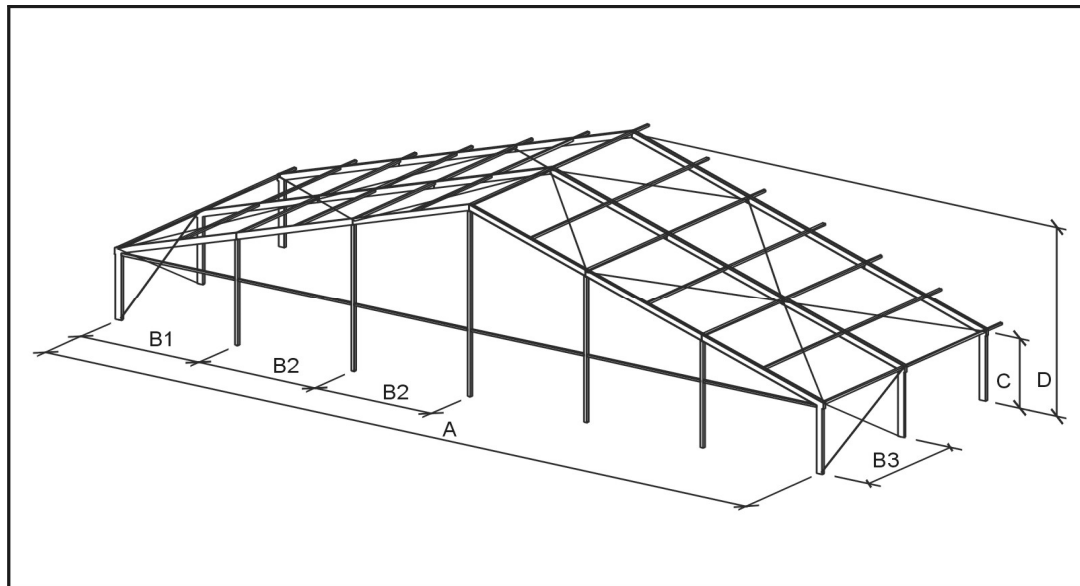

System Measures

Width	(A)	30.13 m
Eave height	(C)	2.85 m
Ridge height	(D)	7.74 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 20.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 30.4/340 · Model: 342

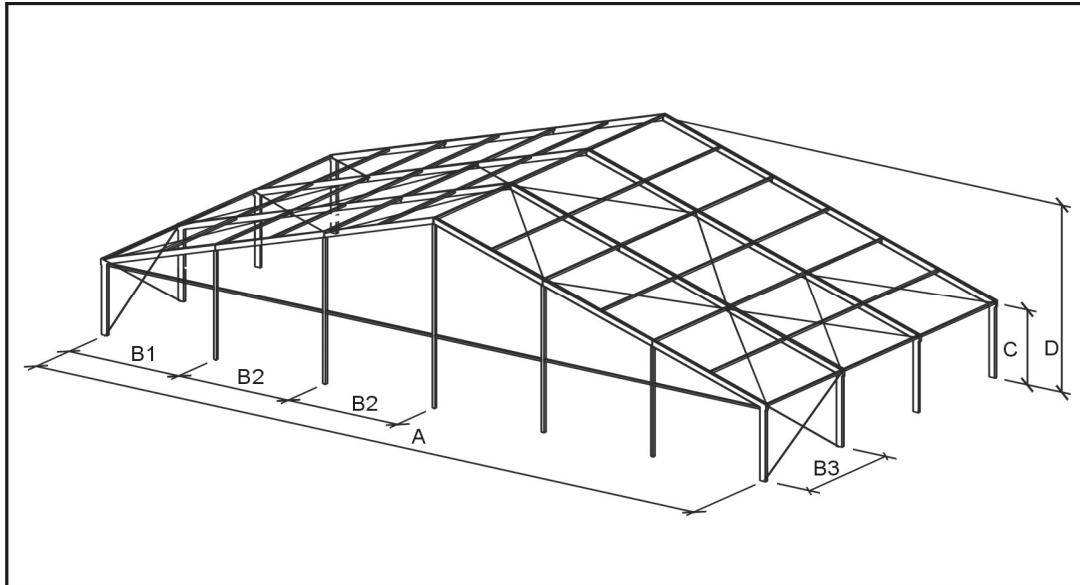

System Measures

Width	(A)	30.13 m
Eave height	(C)	3.25 m
Ridge height	(D)	8.14 m
Gable truss	(B1)	5.06 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 25.00 m
Max. length unlimited in truss-distance


Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com



uniflex Party and Exhibition Hall

Type: 30.4/400 · Model: 283

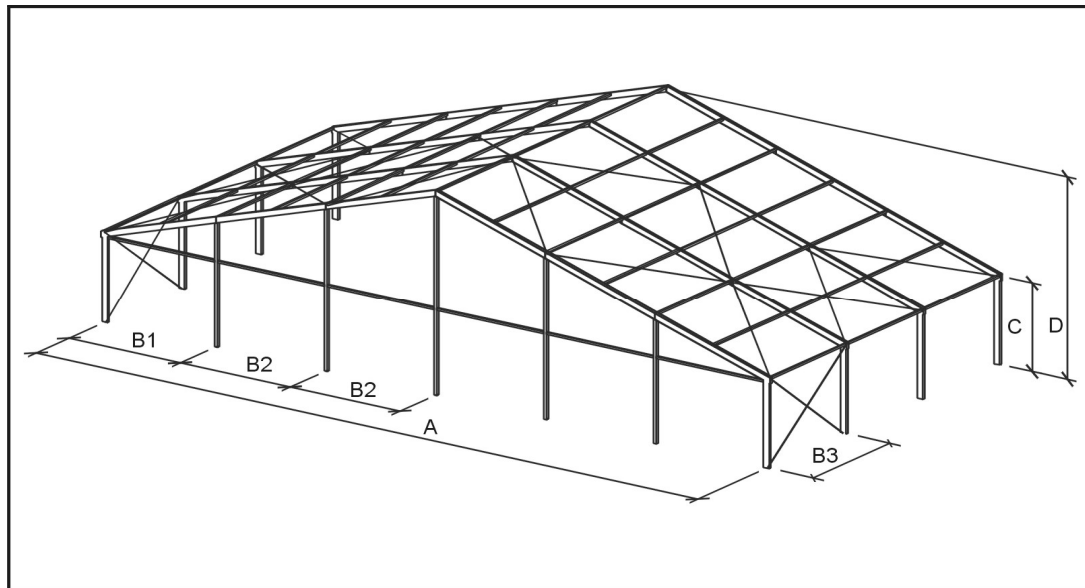

System Measures

Width	(A)	30.13 m
Eave height	(C)	3.85 m
Ridge height	(D)	8.74 m
Gable truss	(B1)	5.09 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		10.60 m
Truss profile		250 x 120 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782
Min. length 25.00 m
Max. length unlimited in truss-distance

Subject to technical modifications!

Losberger U.S., LLC
285 Bucheimer Road, Suite A
Frederick, MD 21701
Phone: 800.964.8368
Fax: 301.682.8005
E-Mail: losbergerus@losberger.com
www.losbergerus.com

