


multiflex plus P7 Arcum

Type: 6/250

Model: 908

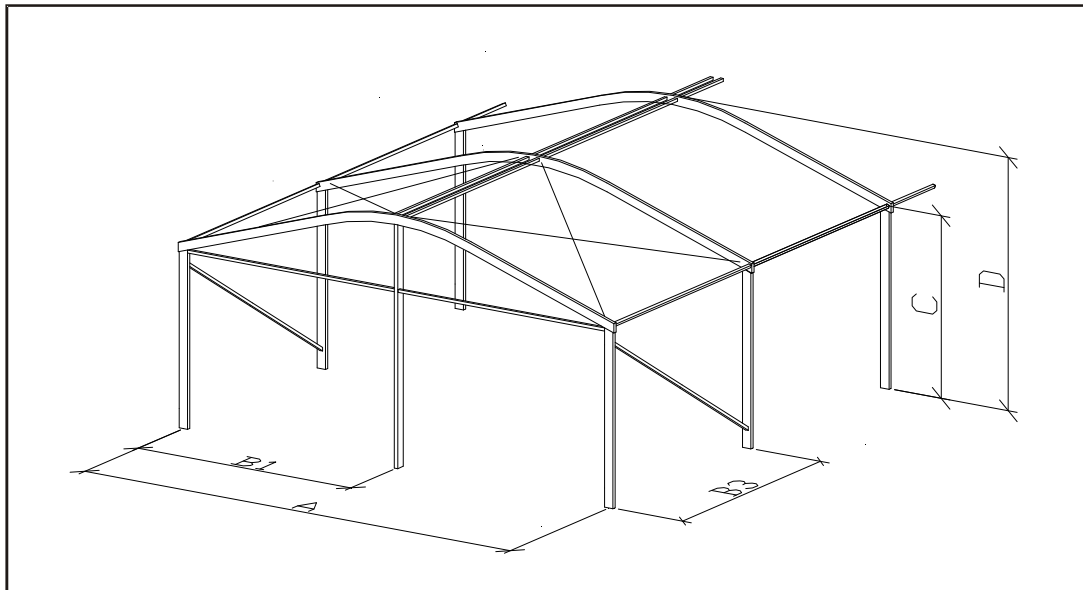

System Measures

Width	(A)	6.07 m
Eave height	(C)	2.49 m
Ridge height	(D)	3.45 m
Peak height	(E)	0,00 m
Roof slope		20.00 °
Truss-distance	(B3)	3.00 m
Longest component		3.60 m
Truss profile		120 x 48 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Min. length 6.00 m

Max. length unlimited in truss-distance

Subject to technical modifications!

Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com


Subsidiaries and Agencies Worldwide



multiflex plus P7 Arcum

Type: 9/250

Model: 886

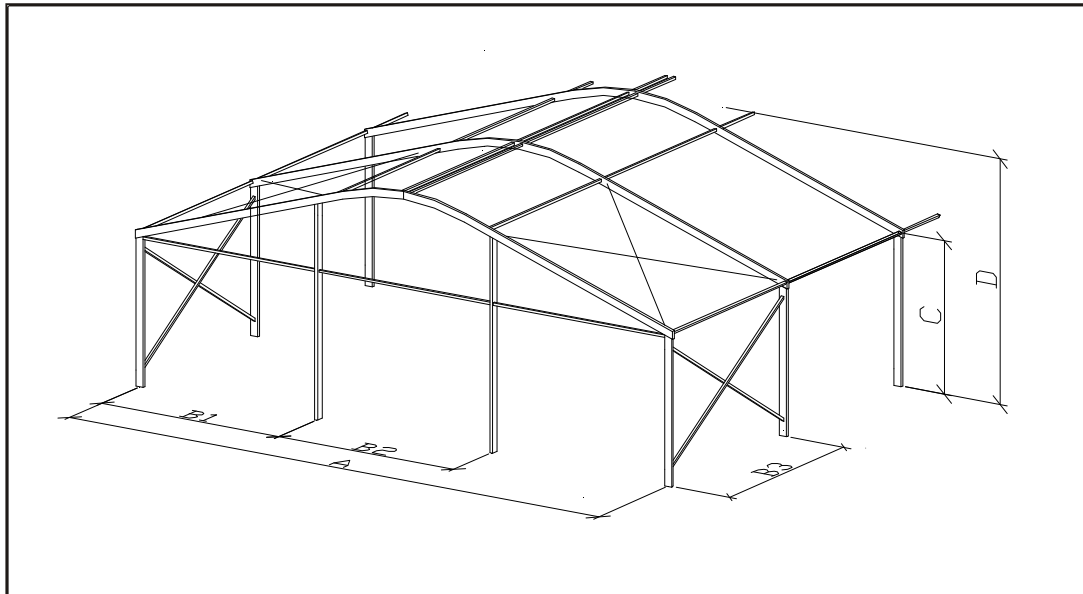

System Measures

Width	(A)	9.07 m
Eave height	(C)	2.49 m
Ridge height	(D)	3.99 m
Peak height	(E)	0,00 m
Roof slope		20.00 °
Truss-distance	(B3)	3.00 m
Longest component		3.60 m
Truss profile		120 x 48 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Min. length 6.00 m

Max. length unlimited in truss-distance

Subject to technical modifications!

Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com


Subsidiaries and Agencies Worldwide



multiflex plus P7 Arcum

Type: 12/250

Model: 914

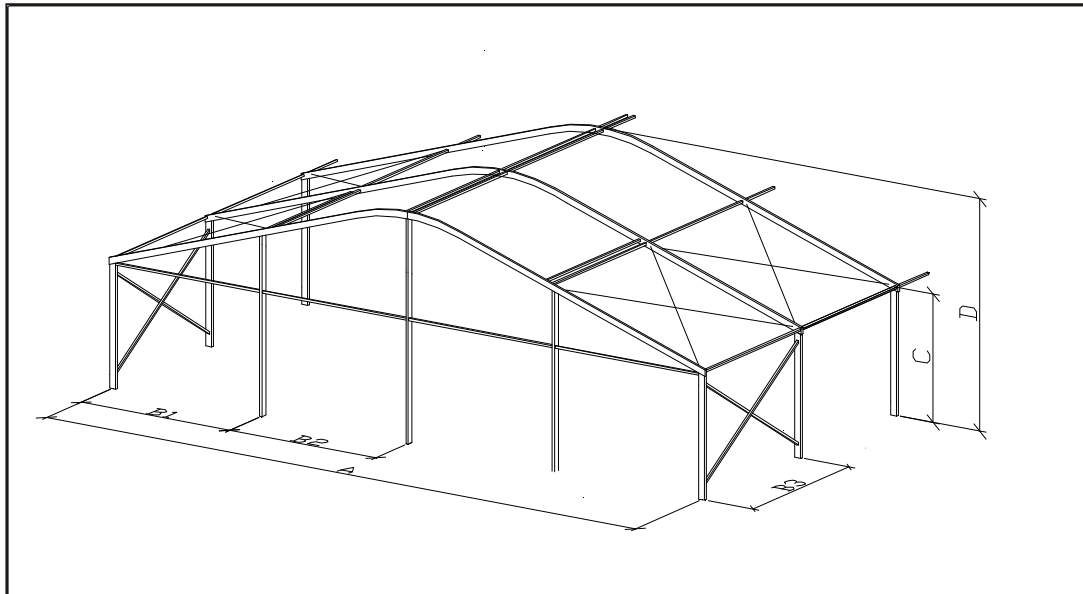

System Measures

Width	(A)	12.07 m
Eave height	(C)	2.49 m
Ridge height	(D)	4.52 m
Peak height	(E)	0,00 m
Roof slope		20.00 °
Truss-distance	(B3)	3.00 m
Longest component		4.86 m
Truss profile		120 x 48 mm

Technical Description

Aluminium Profiles

Solid, hard pressed
4-groove aluminium hollow profile

Steel Parts

Hot-dip galvanized according to DIN EN ISO 1461

Ground Anchoring

Ground stakes or weight anchoring upon request

Load Requirements/Technical Data

Wind load acc. to DIN EN 13782

Min. length 12,00 m

Max. length unlimited in truss-distance

Subject to technical modifications!

Losberger GmbH
Fürfeld · Gottlieb-Daimler-Ring 14
74906 Bad Rappenau · Germany
Phone: +49 7066 980-0
Fax: +49 7066 980-232
E-Mail: losberger@losberger.com
www.losberger.com

Subsidiaries and Agencies Worldwide

